

A STUDY ON AGRICULTURAL TRACTORS STEERING MECHANISM

4-The steering Forces and power on the front wheels

*Sarhan, A. M. M. **Al – Katary, H. S. ***El- Awady, M. N.

ABSTRACT

The main aim of this research was to increase the operation efficiency of agricultural tractor to suit the conditions and potentials of the Egyptian farmer. This leads to increase the rates of the feddan production and raise the value of the yield per feddan. This meets the requirement to achieve the strategic goals of the agricultural development by modifying and developing the modern technology, especially the agricultural tractors to suit the local environment in all agricultural operations, including plowing. Laboratory experiments and statistical analysis for the data of the research were run and hydraulically steering was designed by using a closed hydraulic circuit for the tractor. The main results obtained from the experiments are summarized in the following main points:

1-Mathematical equations are derived to find the steering forces. 2-Minimum values of the steering force and power (5.211 kN, 0.881 kw). 3-Saving power of the tractor to the maximum extent due to losses in steering. 4-Decreasing the costs maintaining the tractor by decreasing the costs maintaining of tractor steering equipments. 5-Decreasing the repeated technical problems in the steering equipments of the tractors. 6-The modification suits all the agricultural operations even for small holdings in Egypt.

INTRODUCTION

The agricultural tractor is the backbone of the Egyptian agriculture because it does all the different field processes. It must be improved to suit the conditions and potentials of the Egyptian farmer to increase the efficiency of its operation. This study aims to develop steering in particular. It aims to design a mechanism which can be controlled hydraulically to work on the front land-wheels.

*Ph. D. Stud. Dept. Eng., Fac. Agric., Al-Azhar Univ. Cairo Egypt .

**Prof., Agric. Eng. Dept., Fac. Agric., Al-Azhar Univ. Cairo Egypt .

***Emt. Prof., Agric. Eng. Dept., Fac. Agric., Ain Shams Univ.

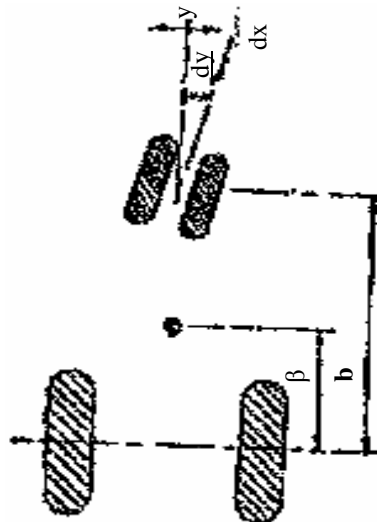


Fig (1): Geometry of tractor wheels when turning, Liljedahl and Strait (1962b).

Liljedahl et al. (1959) found that maximum forces were greater than the preload setting on both the “Case and John Deere” tractors. This is probably because the drivers were, for a short time, steering at a rate greater than the power steering could follow and when the John Deere 70 was equipped with a front-end loader and driven in a figure of eight, power steering reduced the average steering force by 75 percent and the maximum by 67 percent. Under exactly the same conditions, use of the differential brakes had almost the same effect in reducing steering forces as power steering.

Liljedahl and Strait (1962a) assumed the steering forces are approximately the same as if the tractor were in motion on a rigid level plane surface.

Liljedahl and Strait (1962b) assumed the radial force on the tractor wheels when turning is:

$$F = \frac{W}{g} \times a = \frac{W}{g} \times \frac{V^2}{b} \times \frac{dy}{dx}$$

Where: **W**: Weight of tractor, **a**: Acceleration, **g**: Gravity, **b**: Wheelbase of tractor, $\frac{\beta}{b} = \frac{1}{2}$, **β**: Distance from center of gravity to back wheels of tractor, **V**: Speed of tractor, **y**: Position of tractor between the rows, **x**: Position of tractor along the rows, as shown in Fig. (1).

Richardson and Cooper (1970) found that the use of articulated steering resulted in decreased reactive performance when compared with performance in a straight line. Measures of reactive performance used in reaching this conclusion were drawbar pull and work index. Pull vs. slip and pull vs. soil strength comparisons were also made.

Katary (1976) reported that optimum tractor weight to drawbar pull ratio, at maximum reactive power efficiency, is **2.47** and **2.669** on asphalt and stubble field, respectively.

Kuipers (1991) found that the open furrow improves fraction acts as a steering aid for the tractor and reduces soil resistances. Nevertheless, systems that avoid subsoil compaction by not driving through the open furrow should be developed further.

Younis et al. (1991) reported the increase in the unit draft for chisel plow about **26%** when the plowing depth increased from **10** to **20** cm.

Sylvio (1993) developed a drawbar force transducer dimensioned for tractor power less than **100 kw** this double extended octagonal ring (**DEOR**) dynamometer was designed to simultaneously measure drawbar draft, vertical and side loads without altering the tractor-implement hitch point configuration. Side loads are derived from the differential draft outputs of the two extended octagonal ring (**EOR**).

Metwalli et al. (2002) showed that when soil conditions were in a good working range for tillage operations, a significant increase in implement draft was observed with an increase in forward speed, plowing tillage depth and inflation pressure.

Metwalli et al. (2004) showed that the power requirement increased by increasing sub-soiling depth by **28.05%** and **72.93%** at **55** and **65** cm respectively, compared with power at **45** cm depth. The distance between shares had no effect on power requirement at the same depth (in their experiment).

2-8: The moment:

Liljedahl et al. (1959) indicated that when (**33.9 m. N**) torque was applied manually to the steering wheel, approximately **25** percent was absorbed by the steering soil.

Liljedahl and Strait (1962a) assumed that the moment on the vertical front-wheel spindle, or kingpins, is:

$$M = K \times \frac{dy}{dt}$$

Where: **K:** is the tractor steering-force parameter which depends upon the speed and configuration of the tractor, **t:** time, **y:** position of tractor between the rows (function of time).

Liljedahl and Strait (1962b) assumed the moment on the front wheel spindle due to turning forces is:

$$M_a = \frac{WC}{gb^2} V^2 \frac{dy}{dx}$$

And for a four-wheel configuration:

$$M = \left[\frac{WC\beta V}{gb^2} + \frac{We\beta \sin \theta}{2Vb} \right] \frac{dy}{dt} = K \frac{dy}{dt}$$

Where: C: Caster of front wheel, constant equal 2.54cm. θ : kingpin inclination, e: kingpin offset.

Bahnassi (1999) reported that mobility number as determined from an existing model can be used to specify the contact area, wheel developed torque and net thrust.

2-9: The power:

Liljedahl et al. (1959) stated that power steering reduced average, maximum forces by **50** percent on the “Case” tractor while cultivating corn and steering at a rate greater than the power steering could follow.

Katary (1976) reported the following main points:

1-Rolling resistance horsepower is higher on stubble field than on asphalt and increases by the increase in tractor speed. **2-**Tractive power efficiency is lower at higher gear ratios. **3-**Unit draft increases by the increase in tractor speed. **4-**The slippage horsepower increases by the increase of drawbar pull at the same gear.

Awady (1979) found from his study to select the tractor power to suit the land holdings under the conditions of Kingdom of Saudi and Arab Republic of Egypt that the optimum tractor and implement size ranges between **14** and **17 HP**.

Awady et al. (1981) carried out a study on a prototype designed and built by Egyptian “Small-scale agricultural activities project” to replace work stock animals. Their study included measurements of weight and its distribution, tillage capability, rolling resistance, and traction. They found that the total weight is 2600n distributed such that 1950N falls on the rear

traction–tyre and 650N on the front supporting types. The weight /power ratio is thus 371N/HP or 520N/kw –This ratio is so low that ballast weight of some 3000N can be added to the unit. They pointed out also that rolling resistance ranges from 0.31 for motion on paved road at low speed to 0.86 on tilled soil at a higher speed. Although the figures are higher than for a single tyre, they are reasonable for the presence of motion transmission system and roughness of the land surface.

Kamel (1987) reported that the highest power unit (36kw) consumed less fuel per unit rate of work than other power units (23and 28kw)

MATERIAL AND METHODS

A- Tractor:

The Belarus tractor, **65B.HP (48.2kw)** was common and widespread under Egyptian conditions. The tractor is multi purpose of the model **10M3-6KM**. It was used in this research. The tractor was tested in plowing operation. After modification it was tested at agricultural tractors and machinery research laboratory, Agricultural Engineering Department, Faculty of Agriculture, Al-Azhar University.

A-1: The tractor before modification:

1- Gasoline engine (**65 HP, 48.2kw**) at **1750 rpm**. **2-** Wheels (four wheels). **3-**Minimum turning radius = **5m**.

4- Steering system:

(A): The components: It consists of: **(1):**Front axle; **(2):**Steering wheel to track width adjustment mechanism, determining the front wheel toe-in and checking toe-in of steering wheels; **(3):**Sector, spool, bushing, steering gear case, rack and oil drain pipeline (**Fig.2**); **(4):** Steering column, shock absorbers, sleeve, steering wheel shaft and steering wheel; **(5):** Steering gear, steering arm, steering shaft and worm gear; **(6):**Hydraulic steering servo, housing, spring washer and front cover; **(7):**Mounted at the middle position on the tractor.

(B): The disadvantages of power steering: **1-** Difficult to repair and maintain. **2-**Costs of repair and maintenance. **3-**The spare parts price is expensive. **4-**Complex construction. **5-**Mechanical steering system with addition to hydraulic steering servo.

A-2: The tractor after modification:

The tractor was modified to overcome the problems encountered during the experimentation. The specifications of the tractor after modification are the same of tractor before modification but the different are follows:

Apparatus of power hydraulic steering system:

It was power hydraulic steering circuit, Fig (3):

The components: It consists of: 1- Reservoir (Transmission housing); 2- Filter on intake; 2B-Filter on delivery; 3- Hydraulic pump. It consists of: A-Suction port; R-Lube fillets;

I): Bearings; 2):Seals; 3):Cover; 4):Key; 8):Bearing; 9):Bushes; 10):Pipe union; 11):Pump body; 12):Engine block; 13):Conductor pinion; 4-Rotary valve; 5, 9- Check valve; 6-Pressure relief valve; 7-Hydraulic steering control valve: It consists of: 1): Fixing screw; 2): Lower cap; 4):Spacer; 6):Stator; 7): Rotor; 8):Intermediate flange; 9):Non return valve; 10): Pressure limit valve; 14): Distributor; 15, 18):Anti-cavitations valve; 6):Distributor body; 17):Anti-shock valve; 19):Short circuit valve; 21):Grooved hub; 25):Upper cap. 8- Transfer pump/motor; 17-Sleeve; 18-Anti-shock valves (cylinder safety valves); 19-Anti-cavitations valves (Makeup valves); 22- Power cylinder: It consists of: 1):Cylinder; 2):Locking; 3): Bearing; 4):Gland; 5):“O” Ring; 6, 12, 13):Seal; 7): Wiper seal; 8):Gland locking; 9):Cylinder rod; 10):Retaining Ring; 11):Piston. 23- Ducts: A-Intake; B- Delivery; C-Return; D-Users on LH side of power cylinder; E-Users on RH side of power cylinder; F-Anti-shock valve discharge; G- Transmission oil cooler; R-Flow regulator; W-Steering wheel.

B-: Devices:

B-1: Surveying instruments:

Tape steel 20m, steel ruler 30cm and arrows were used for measuring and determining longitudinal dimensions. Pins were used for hitching the hydraulic dynamometer from both sides. Steel bolts and plastic threads were used for determining angle.

B-2: The models:

Models were made at the central workshops in the Ministry of Agriculture and Land Reclamation, to measure the steering angles. Models for the mechanisms were made of wooden bars, for the various geometrical

dimensions. They generally conform to as small scale of 1:2. The model configurations had the variable dimensions shown in Table (1).

Table (1): The variable dimensions of the models.

Configuration No.	Dimensions in mm.					
	W	W/2 or W/3	TR	r	Cot ϕ - Cot θ	
1	960	W/2	480	912	192	0.39
2	1110		555	1050	222	0.45
3	1260		630	1200	252	0.51
4	1410		705	1340	282	0.58
5	1110	W/3 =370	1050	222	0.45	

Their dimensions consist of fixed dimensions (Cot θ =W/WB, WB=2450, e=70mm, r/W=0.2, TR/W=0.95 and $\gamma_0 = \pi/2 = 90^\circ$). The rest of dimensions are shown in (Fig.6).

A natural-size model was made of steel to Conform with the tractor modifications.

Where: WB=Wheel base, W=Steering pivots distance (1110mm), r=Steering arm length, TR=Tie-rod length, ϕ = Outer front wheel steering angle, θ = Inner front wheel steering angle, e=the distance between tie-rod and hydraulic cylinder base γ_0 = Upright angle, equal ($\pi/2$).

B-3- Hydraulic dynamometer:

A self recording hydraulic dynamometer model (VCD NESS UND REGELTECHNIK GMBH) used for measuring the forces situated on the front wheels. Its capacity is 50 kN and its accuracy is 0.5 kN, by oil-pressure gauge which measures oil pressure. Accuracy of the gauge is 0.1 bar or 10 kPa.

C- Experimental procedures: Forces, moments and power on the front wheel or its equivalents are required to steer the tractor over a given surface. The aim of this test was to determine the consumed power in steering of the tractor under test at average speed, different hydraulic cylinder; its rod-lengths were (70.4, 68.1, 65.8, 63.5, 61.2 and 58.9cm).

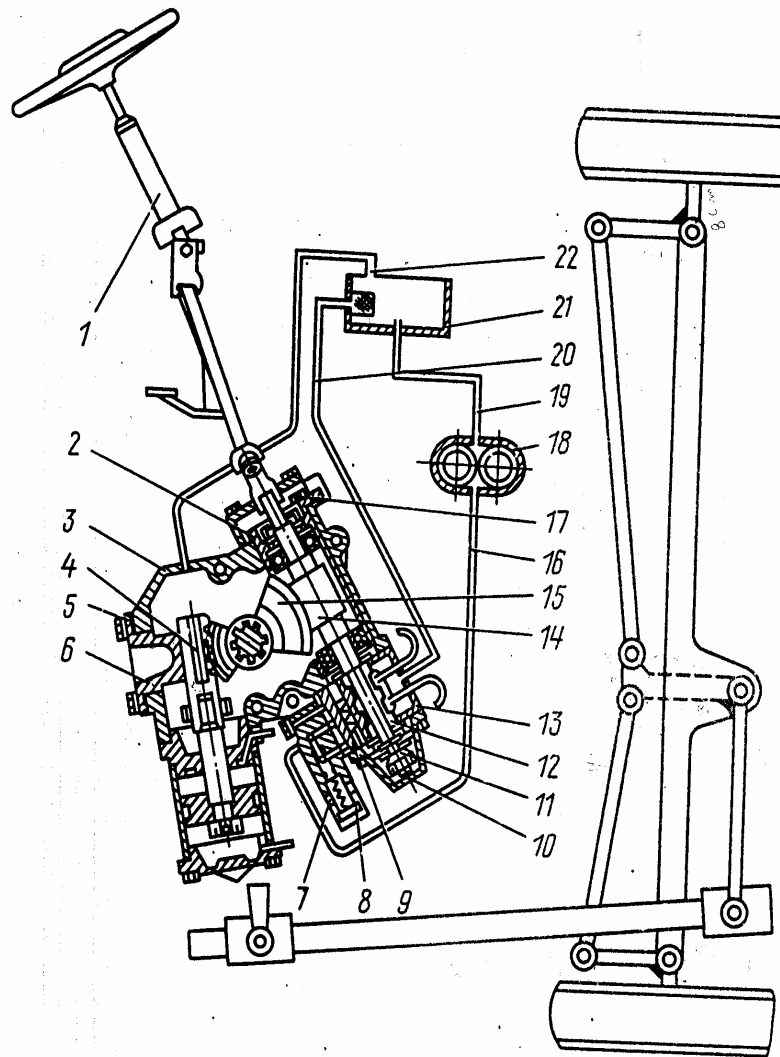


Fig. (2): Diagram of steering gear hydraulic Booster:

1- steering column ; 2- bushing ; 3- steering gear case ; 4- rack ; 5- gasket ; 6- rest 7- lock nut ; 8- screw ; 9- safety valve ; 10- cover ; 11- spherical nut ; 12 – spool ; 13- control valve housing ; 14- worm ;15- sector ;16- oil delivery pipeline ; 17- bolt ; 18- oil pum ;19 – oil suction pipeline ; 20- oil return pipeline ; 21 – oil tank ; 22- oil drain pipeline (Gurevich and Sorokin,1976).

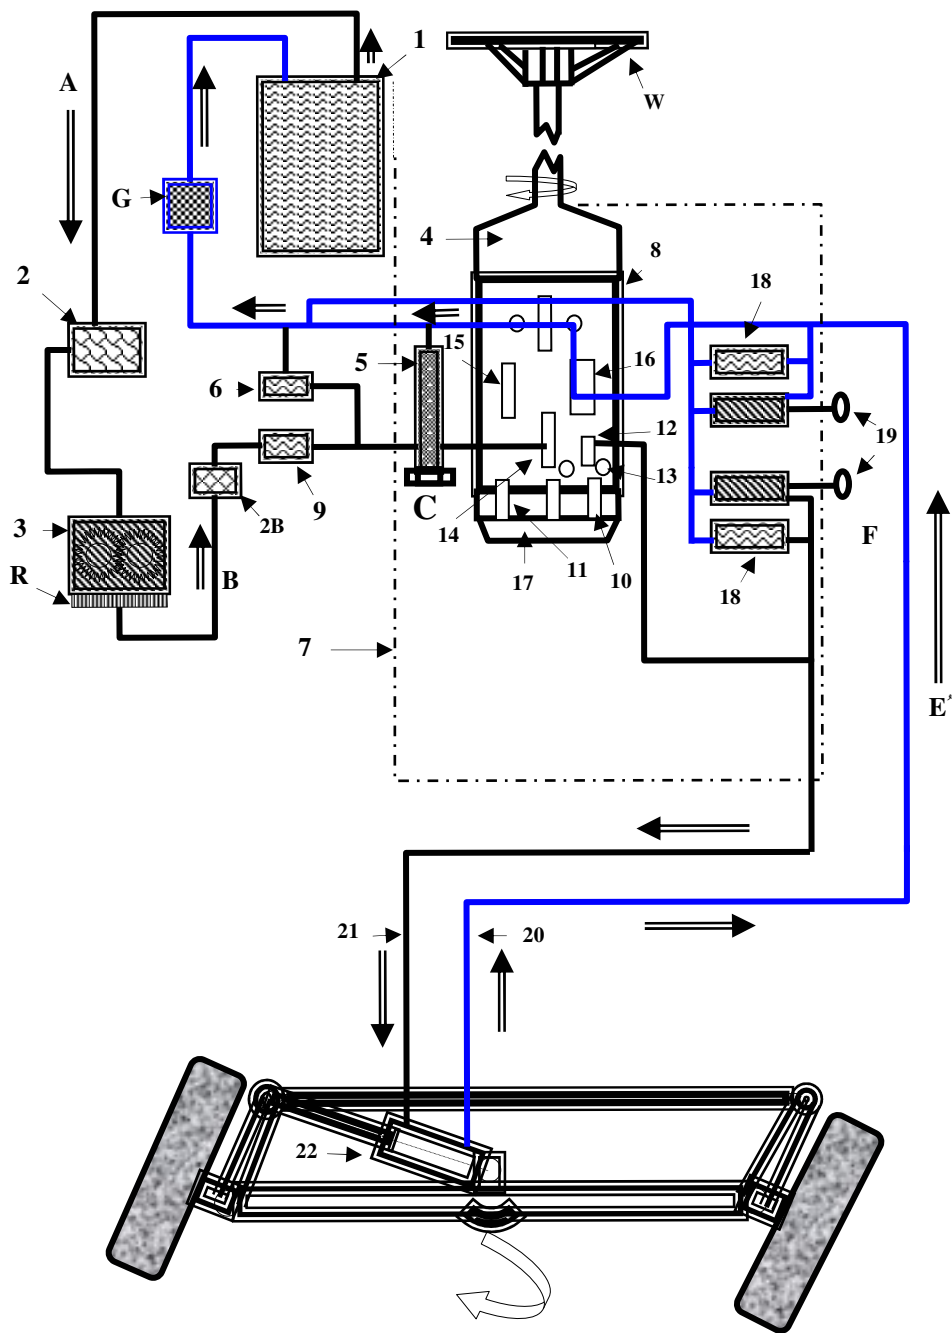


Fig. (3): Schematic drawing for apparatus of power hydraulic steering system.

Four of the loads on front wheels were used (5.0, 5.5, 6.0, and 6.5 kN), speeds were (1st, 2nd, 3rd and 4th gears), four replicates and four of values of W/WB were used (0.39, 0.45, 0.51, 0.58). Five traction surfaces were used (namely, air, concrete surface, clay, sandy clay and sandy surfaces). The tractor having power of 65 B.HP (48.2 kw) was used to draw the tested tractor and the forces and moments were determined through recording hydraulic dynamometer. The measured distance of the test course was fixed throughout the test at 100 meters for each run, and the average speed was calculated relative to the travel time in sixteen replicates, the forces, moments and power at the average speed, different traction surfaces and soil conditions.

D-Using mathematical analysis for the common-center-steering systems of tractors:

Analytical program was derived for 4-bar mechanism (steering mechanism) referring to Figs (4 through 6), based on the mechanism data: WB: wheelbase(2450mm), W: Steering pivots distance(1110 mm), r: Steering arm length(222mm), θ_0 :Initial steering arm angle(8.29°), TR: Tie-rod length(105cm), θ : Inner front wheel steering angle, ϕ :Outer front wheel steering angle; I: Instantaneous center. Equations of the forces, moments and required steering power are given as shown in Figs (4 through 6) .

Tractor engine power required for steering operation can be determined by using the following equation:

$$P_t = Q \times p$$

The above equation gives: $P_t = \frac{F \times v}{100 \times 75}$

Which can be rearranged to find P_{act} a given P_t and P_{air} as follows: $P_{act} = P_t - P_{air}$ **Where:** P_t : is steering power in **kw**; Q = Oil pump rate of discharge in m^3/s ; $Q = A \times V$; A = Piston area in m; p = Oil pressure in **kPa**.; V = the piston speed in m/s. In this case piston forward speed= **(0.17m/s)**; and backward speed= **(0.20m/s)**; P_{act} =Actual steering power in **kw**; P_{air} =the total (theoretical) steering power for air treatment losses in inside friction in **kw**.

RESULTS AND DISCUSSION

The study was carried out to indicate effects of the cylinder length and the tractor dimensions at different geometric proportions on the following factors:

(1): Steering force variation with angle:

Figs (4 through 6), illustrate effect of the steering angle, the piston steering angles, constant dimensions of the values of (F_1) and (F_2 or F_t) at different geometric proportions. The steering forces (F_1 , F_2) equations can be derived as follow:

$$T_1 = \frac{wCV^2}{2g(WB)} \text{Cot } \phi_{act} \quad ; \quad T_2 = \frac{wCV^2}{2g(WB)} \text{Cot } \theta_{act}$$

$$T_1 = T_2 + \frac{wC(W)V^2}{2g(WB)^2} \quad ; \quad T_2 = T_1 - \frac{wC(W)V^2}{2g(WB)^2}$$

$$F_1 = \frac{T_1}{r \cos \varphi} ; F_2 \text{ or } F_t = \frac{T_2 + F_1 \cos(\delta + \theta + \theta_0)}{r \sin(\psi + \theta + \theta_0)} ; \text{ or } = \frac{T_2 + T_1 \left(\frac{\cos(\delta + \theta + \theta_0)}{\cos \varphi} \right)}{r \sin(\psi + \theta + \theta_0)}$$

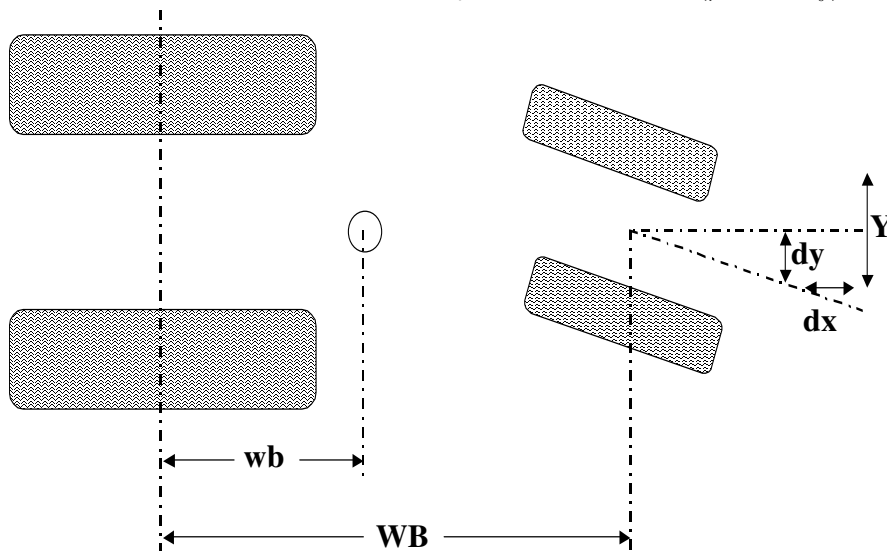


Fig. (4): Geometry of tractor wheels when turning.

(2): Effect of the load and the cylinder length on the steering force and power:

From Figs (8 and 10), it is clear that for all loads, the steering force and power increased with the traction surface loosening. Values of the theoretical steering force (F_t) and power (P_t) were (0.860, 6.592, 7.027, 7.393, 7.482 kN); (0.145, 1.062, 1.188, 1.25, 1.265 kw), also values the actual steering forces (F_{act}) and power (P_{act}) were (5.732, 6.167, 6.533, 6.622 kN); (0.969, 1.042, 1.104, 1.119 kw) at surfaces of about concrete, clay, sandy clay, and sandy, respectively.

Figs (9 and 11), indicate that for all the traction surfaces, the steering force, power increased with the hydraulic cylinder length probably due to the increase of the steering angle. Values of the theoretical steering force (F_t), power (P_t); the actual steering forces (F_{act}) and power (P_{act}) varied from about (4.939 to 9.051 kN); (0.835 to 1.530 kW); (4.216 to 7.725 kN); (0.713 to 1.306 kw) at the hydraulic cylinder length varying from about (58.9 to 70.4 cm), respectively.

Figs (8 through 11), show that for all the traction surfaces and the cylinder length the steering force and power increased with the load on front wheels probably due to the increase of the contact area. Values of the theoretical steering force (F_t), power (P_t); the actual steering forces (F_{act}) and power (P_{act}) varied from about (5.127 to 6.616 kN); (0.866 to 1.119 kw); (4.267 to 5.756 kN); (0.721 to 0.973 kw) at loads on front wheels varying from about (5.0 to 6.5 kN), respectively.

(3): Effect of the speed and the cylinder length on the steering force and power:

From Figs (8 and 10), it is clear that for all speeds, the steering force and power increased with the traction surfaces loosening. Values of the theoretical steering force (F_t) and power (P_t) were (0.86, 6.156, 6.563, 6.902, 6.988 kN); (0.145, 1.041, 1.109, 1.166, 1.181 kw), also values the actual steering forces (F_{act}) and power (P_{act}) were (5.296, 5.703, 6.042, 6.128 kN); (0.9, 0.963, 1.021, 1.036 kw) at the traction surfaces of about concrete, clay, sandy clay and sandy, respectively.

Figs (9 and 11), indicate that for all the traction surfaces, the steering force and power increased with the hydraulic cylinder length probably due to the increase of the steering angle. Values of the theoretical steering

force (F_t), power (P_t); the actual steering force (F_{act}) and power (P_{act}) varied from about (4.623 to 8.47 kN); (0.781 to 1.432 kw); (3.9 to 7.144 kN); (0.658 to 1.207 kw) at the hydraulic cylinder length varying from about (58.9 to 70.4 cm), respectively.

Figs (8 through 11), show that for all the traction surfaces and all the hydraulic cylinder length the steering force, power decreased with increasing speed of the tractor. Values of the theoretical steering force (F_t), power (P_t); the actual steering forces (F_{act}) and power (P_{act}) varied from about (4.518 to 6.609 kN); (0.764 to 1.117 kw); (3.658 to 5.749 kN); (0.618 to 0.972 kw) at speeds of the tractor varying from about (1st to 4th gears), respectively.

(4): Effect of the W/WB and the cylinder length on the steering force and power:

From Figs (8 and 10), it is clear that for all the value of W/WB, the steering force and power increased with increasing the traction surface loosening. Values of (F_t) and (P_t) were (0.86, 6.171, 6.578, 6.917, 7.104 kN); (0.145, 1.045, 1.112, 1.17, 1.201 kw), also values the actual steering forces (F_{act}) and power (P_{act}) were (5.311, 5.718, 6.057, 6.244 kN); (0.899, 0.966, 1.025, 1.056 kw) at the traction surfaces of about concrete, clay, sandy clay, and sandy, respectively.

Figs (9 and 11), indicate that for all the traction surfaces, the steering force and power increased with the hydraulic cylinder length probably due to the increase of the steering angle. Values of the theoretical steering force (F_t), power (P_t); the actual steering forces (F_{act}) and power (P_{act}) varied from about (4.623 to 8.489 kN); (0.783 to 1.435 kw); (3.9 to 7.163 kN); (0.661 to 1.21 kw) at the hydraulic cylinder length varying from about (58.9 to 70.4cm), respectively.

Figs (8 through 11), show that for all traction surfaces and all the hydraulic cylinder length the steering force and power increased with the value of W/WB probably due to the increase of the steering angle. Values of the theoretical steering force (F_t), power (P_t); the actual steering forces (F_{act}) and power (P_{act}) varied from about (4.676 to 6.541 kN); (0.790 to 1.107 kw); (3.816 to 5.681 kN); (0.645 to 0.962 kw) at values of W/WB varying from about (0.39 to 0.58), respectively.

SUMMARY AND CONCLUSION

The present study was carried out by using two tractors mounted type chisel plough of 7 tines in two rows locally industrial were used, the Belarus tractor, **65B.HP (48.2 kw)** was usage common and widespread under Egyptian conditions. The tractor before, after common and widespread under Egyptian conditions. The tractor before, after modification (this modification allowed tested tractor to decrease the turning radius from **5** to **1.5** m and decrease the friction between the front wheels and the steering equipments) were constructed and tested at agricultural tractors and machinery research laboratory, Agricultural Engineering Department, Faculty of Agriculture, Al-Azhar University. The main results obtained from experiments are summarized under the following main points:

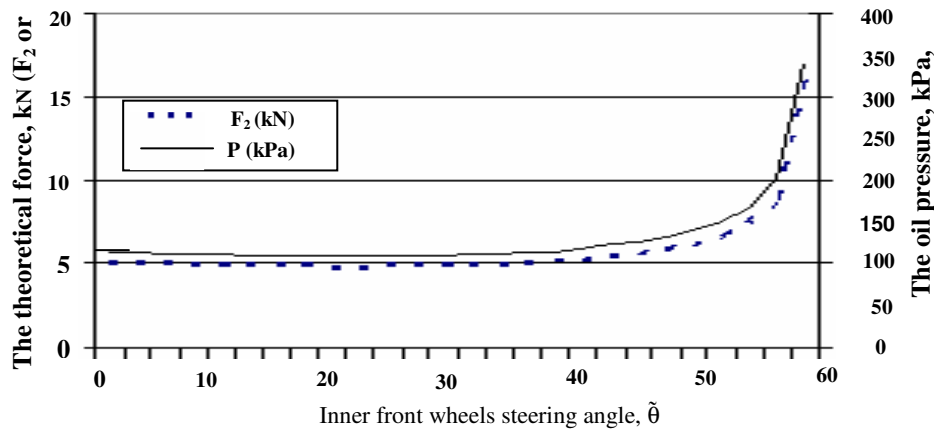


Fig.(7):Effect of the inner front wheel steering angle on the theoretical steering forces on piston surface (F_2 or F_t) and the oil pressure value on the piston surface for 4-bar steering mechanism at value of $W/WB = 0.45$.

(1): Steering force variation with angle:

The theoretical steering forces (F_2 or F_t) increased with the inner front wheels steering angle (θ). Values of (F_2 or F_t) varied from about (5.01 to 15.94 kN) at values of (θ) varying from about 0,2 to 50 degrees, respectively for value of W/WB 0.45.

(2): Effect of the load and the cylinder length on the steering force and power:

The steering force and power increased with the traction surface loosening. Values the theoretical steering force (F_t) and power (P_t) were

FARM MACHINERY AND POWER

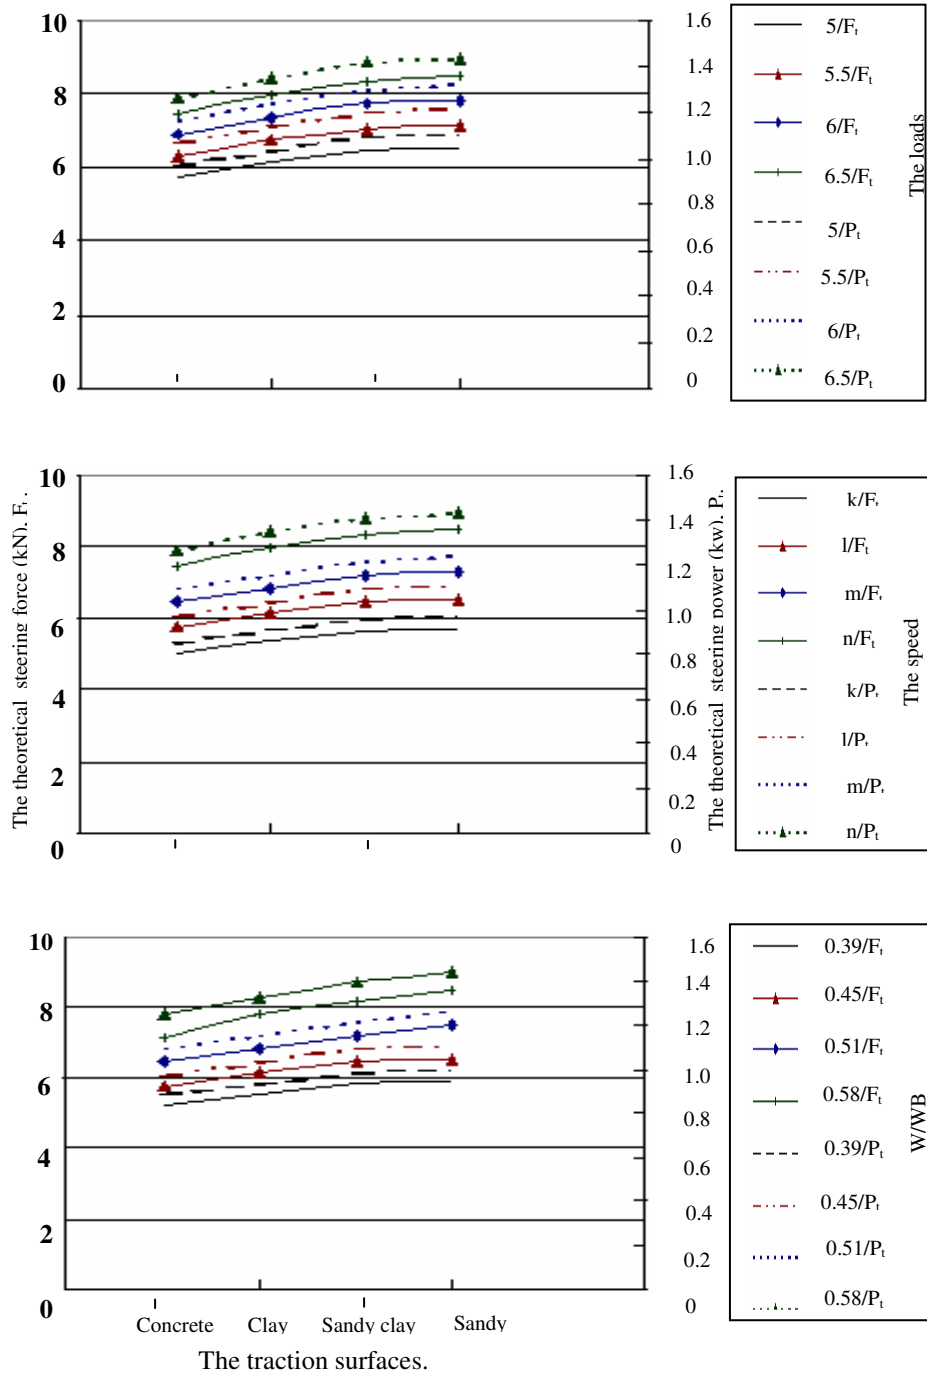


Fig. (8): Effect of the traction surface, load, the speed, the value of (W/WB) on the theoretical steering force and power.

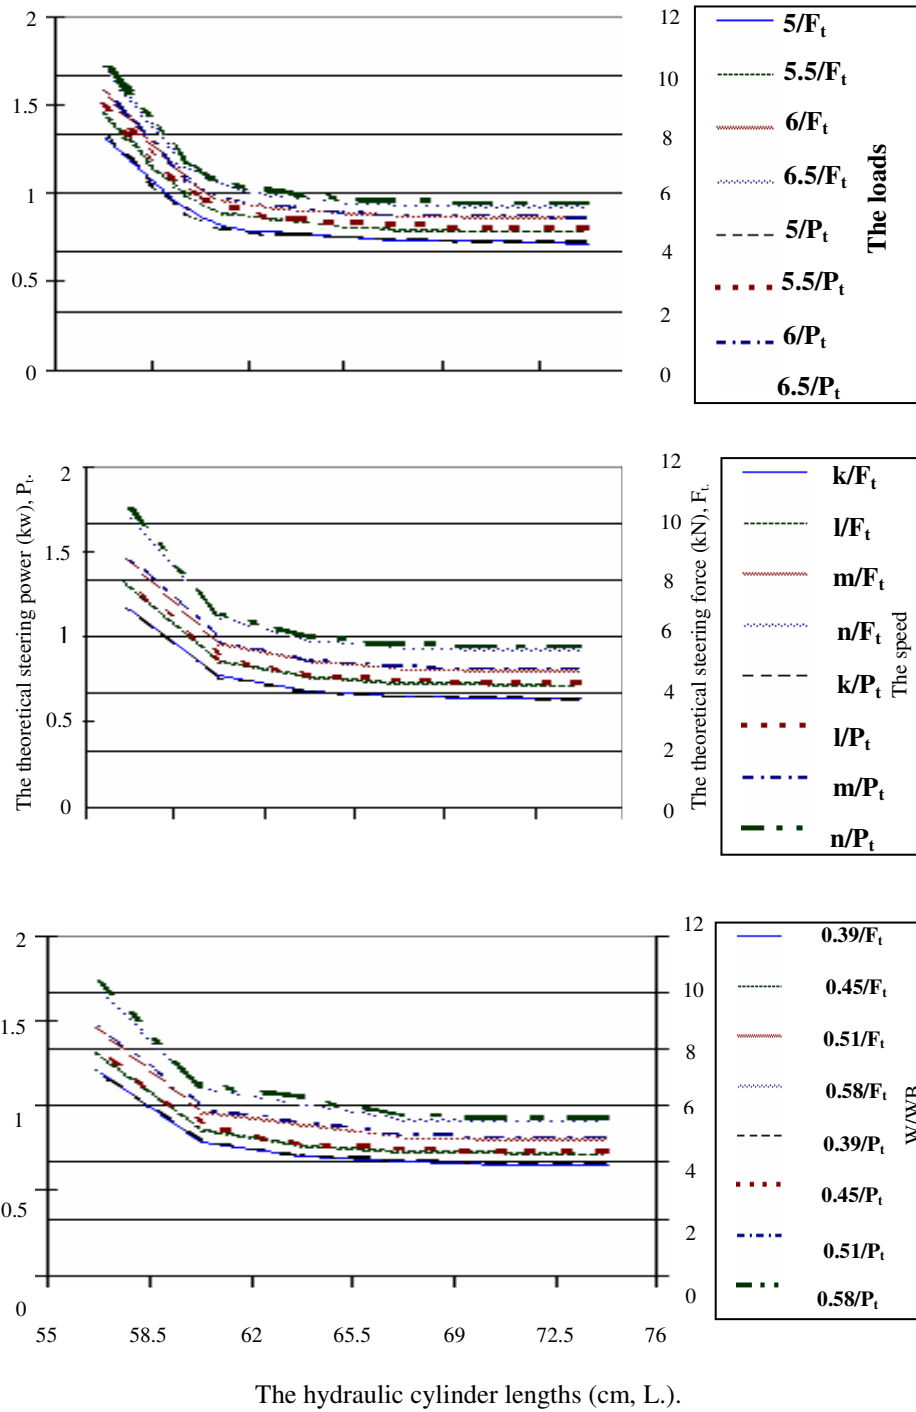


Fig. (9): Effect of hydraulic cylinder length, load, the speed, the value of (W/WB) the theoretical steering force and power.


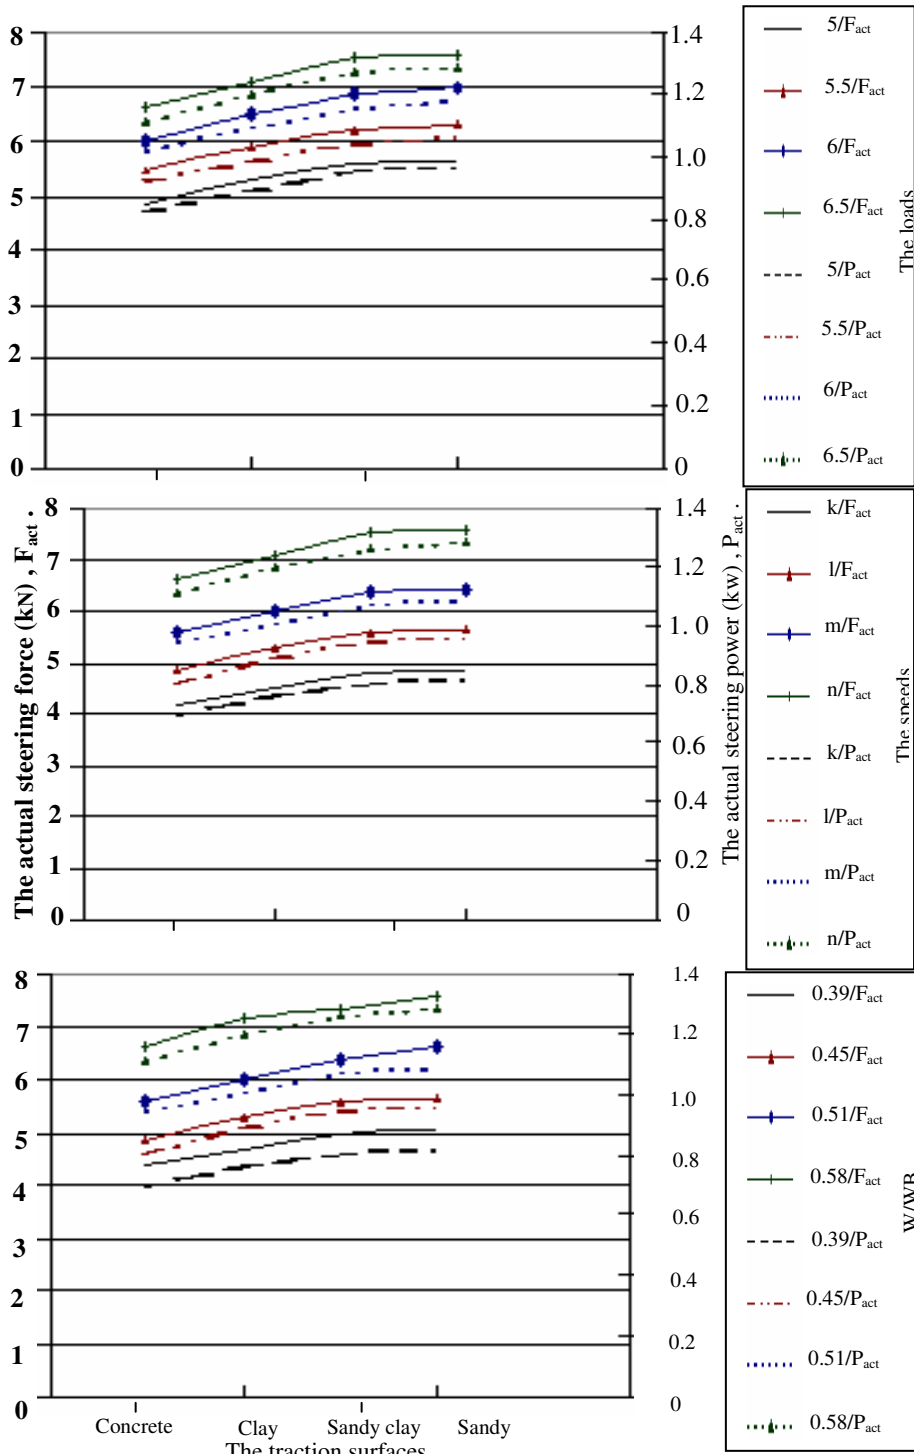


Fig. (10): Effect of the traction surface, load, the speed, the value of (W/WB) On the actual steering force and power.

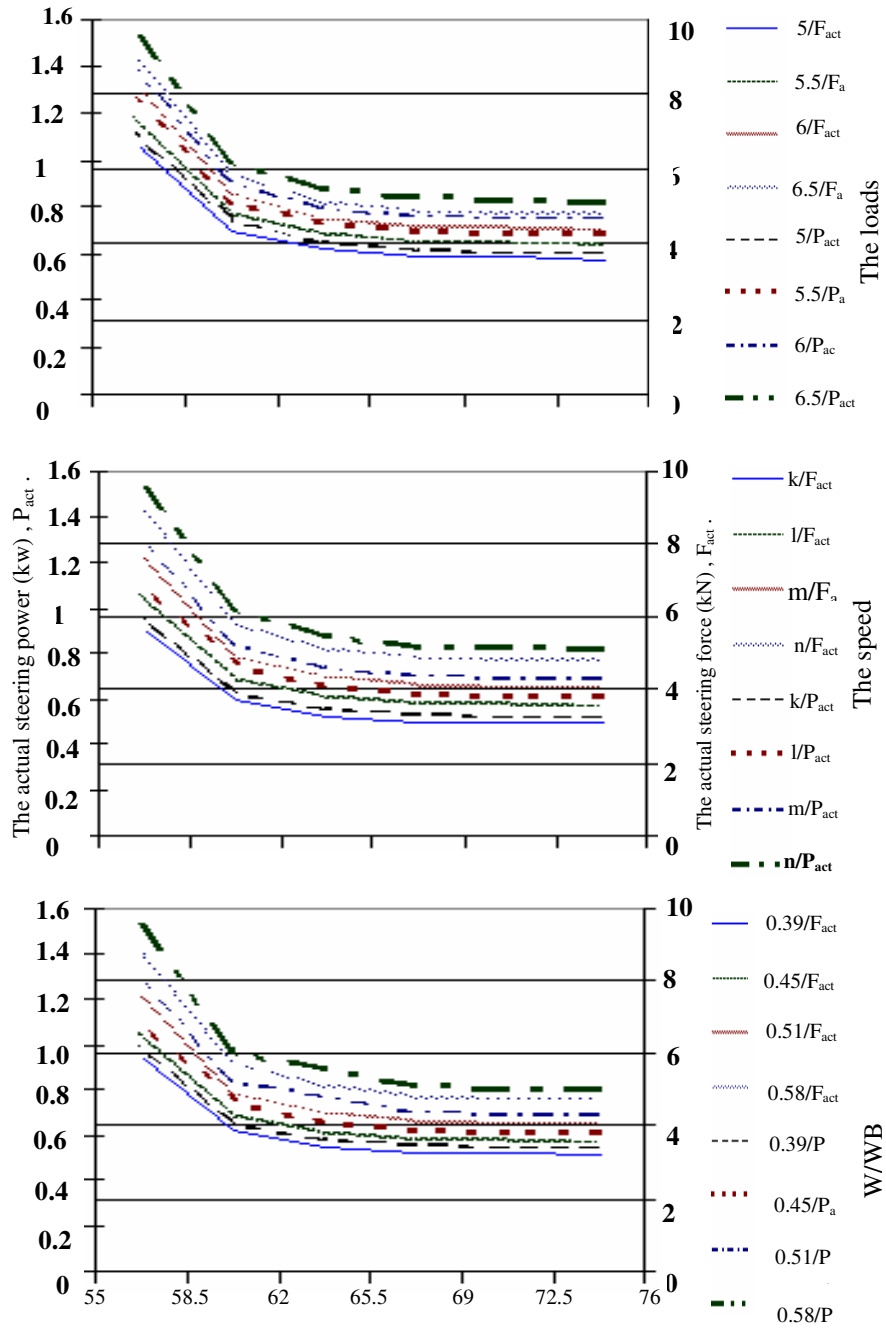

The hydraulic cylinder lengths (cm, L.).

Fig. (11): Effect of hydraulic cylinder length, load, the speed, the value of (W/WB) on the actual steering force and power.

(0.860, 6.592, 7.027, 7.393, 7.482 kN); (0.145, 1.062, 1.188, 1.25, 1.265 kw), also values of the actual steering forces (F_{act}) and power (P_{act}) were (5.732, 6.167, 6.533, 6.622 kN); (0.969, 1.042, 1.104, 1.119 kw) at surfaces of about concrete, clay, sandy clay, and sandy, respectively.

The steering force, power increased with the hydraulic cylinder length. Values of the theoretical steering force (F_t), power (P_t); the actual steering forces (F_{act}) and power (P_{act}) varied from about (4.939 to 9.051 kN); (0.835 to 1.530 kw); (4.216 to 7.725 kN); (0.713 to 1.306 kw) at the hydraulic cylinder length varying from about (58.9 to 70.4 cm), respectively.

The steering force and power increased with the load on front wheels. Values of the theoretical steering force (F_t), power (P_t); the actual steering forces (F_{act}) and power (P_{act}) varied from about (5.127 to 6.616 kN); (0.866 to 1.119 kw); (4.267 to 5.756 kN); (0.721 to 0.973 kw) at loads on front wheels varying from about (5.0 to 6.5 kN), respectively.

(3): Effect of the speed and the cylinder length on the steering force and power:

The steering force and power increased with the traction surfaces loosening. Values of the theoretical steering force (F_t) and power (P_t) were (0.86, 6.156, 6.563, 6.902, 6.988 kN); (0.145, 1.041, 1.109, 1.166, 1.181 kw), also values of the actual steering forces (F_{act}) and power (P_{act}) were (5.296, 5.703, 6.042, 6.128 kN); (0.9, 0.963, 1.021, 1.036 kw) at the traction surfaces of about concrete, clay, sandy clay and sandy, respectively.

The steering force and power increased with the hydraulic cylinder length. Values of the theoretical steering force (F_t), power (P_t); the actual steering force (F_{act}) and power (P_{act}) varied from about (4.623 to 8.47 kN); (0.781 to 1.432 kw); (3.9 to 7.144 kN); (0.658 to 1.207 kw) at the hydraulic cylinder length varying from about (58.9 to 70.4 cm), respectively.

The steering force, power decreased with increasing speed of the tractor. Values of the theoretical steering force (F_t), power (P_t); the actual steering forces (F_{act}) and power (P_{act}) varied from about (4.518 to 6.609 kN); (0.764 to 1.117 kw); (3.658 to 5.749 kN); (0.618 to 0.972 kw) at speeds of the tractor varying from about (1st to 4th gears), respectively.

(4): Effect of the W/WB and the cylinder length on the steering force and power:

The steering force and power increased with increasing the traction surface loosening. Values of (F_t) and (P_t) were (0.86, 6.171, 6.578, 6.917, 7.104 kN); (0.145, 1.045, 1.112, 1.17, 1.201 kw), also values of the actual steering forces (F_{act}) and power (P_{act}) were (5.311, 5.718, 6.057, 6.244 kN) ;(0.899, 0.966, 1.025, 1.056 kw) at the traction surfaces of about concrete, clay, sandy clay, and sandy, respectively.

The steering force and power increased with the hydraulic cylinder length. Values of the theoretical steering force (F_t), power (P_t); the actual steering forces (F_{act}) and power (P_{act}) varied from about (4.623 to 8.489 kN); (0.783 to 1.435 kw); (3.9 to 7.163 kN); (0.661 to 1.21 kw) at the hydraulic cylinder length varying from about (58.9 to 70.4cm), respectively.

The steering force and power increased with the value of W/WB. Values of the theoretical steering force (F_t), power (P_t); the actual steering forces (F_{act}) and power (P_{act}) varied from about (4.676 to 6.541 kN); (0.790 to 1.107 kw); (3.816 to 5.681 kN); (0.645 to 0.962 kw) at values of W/WB varying from about (0.39 to 0.58), respectively, saving power of the tractor to the maximum extent due to losses in steering and increased the tractor efficiency.

REFERENCES

- Awady, M.N. (1979).** “Selection of the tractor power to suit of land holdings and affecting factors.” Document No. **16** Academy of scientific. Research and Technology, Cairo.
- Awady, M.N.; M.N. Mostafa; and S.Y. Ghoniem (1981).** “Studies on an agricultural power unit small tractor.” Res. Bull. **1579**, Agric. in Shams Univ.
- Bahnassi, A.M.F. (1999).**“ Effect of tyre-soil interaction on tractor performance. ” Ph. D. Th., Ag. Mech. Dept., Fac. of Ag. Mansoura U., : **133-135**.
- Gurevich, A.; and Sorokin, E. (1976).** “Tractors.” Mir. Pub., Moscow: 13-16.
- Kamel, M.M. (1987).** “Selecting the optimum sized tractor.” M. Sc/Th., Fac. of Agric., Ain Shams Univ., Egypt: **86-89** .

- Katary, H.S. (1976).** “A study on some specifications of tractor most suitable for Egyptian conditions.” M.Sc. Th. Fac. of Agric., El-Azhar Univ., Cairo, Egypt: **118-123.**
- Kuipers, H. (1991).** “Agronomic aspects of ploughing and non-ploughing.” Soil-and-Tillage-Res., **21:1-2, 167-167; 37 ref.**
- Liljedahl, J.B.; R. Gluck; and M.E. Schroeder (1959).** “Steering-force requirements of wheel tractors.” Ag. Eng., Sept., : **522-525.**
- Liljedal, L.A. and Strait, J. (1962a).** “Automatic tractor steering.” Ag. Eng., June: **332-335.**
- Liljedal, L.A. and Strait, J. (1962b).** “Automatic tractor steering.” Ag. Eng., July: **407-409.**
- Metwalli S. M.; Mohammed H.A. Kabeel; Abdul wahed M. Abou Karima; and**
- Samy El-S.Bader. (2002).** “Effect of forward speed, plowing depth and inflation pressure on tractor performance during tillage.” Misr J. Ag. Eng., **19(3): 597-610.**
- Metwalli, S.M.; Sayed, M.A.; and Osman A.M. (2004).** “Effect of sub-soiling depth and share distance on soil physical properties, power and sunflower yield in calcareous soils.” Misr J. Ag. Eng., **21(2): 509-520.**
- Richardson, B.Y. and A.W. Cooper (1970).** “Effects of articulated steering on tractive performance of a rubber-tired logging tractor.” Trans. ASAE: **633-635.**
- Sylvio (1993).** “Improved double error drawbar pull transducer from 3-D forces measurements.” ASAE paper No. **93-3076: 930-934.**
- Younis, S.M.; N.A. Shaibon; and A.M. Zein El-Din (1991).** “Evaluation of eleven tillage treatments used for cultivation of bean, wheat and cotton crops in Egyptian salty soil.” Misr. J. Ag. Eng., **8 (I):11-26.**

الملخص العربي

دراسة على كفاءة أجهزة توجيه الجرارات الزراعية

4- قوة وقدرة التوجيه

أبو الخير مصطفى محمد سرحان* حسني سلطان القطري** محمد نبيل العوضي***

تهدف هذه الدراسة إلى معرفة النظام الأمثل لتشغيل وصيانة الجرار الزراعي بصفة عامة والتوجيه والقيادة بصفة خاصة وبالتالي تصميم جهاز توجيه آلي يتم تشغيله بطريقة هيدروليكية بحيث تعمل كوحدة مجمعة تحت جميع خطوات التشغيل ونقل الحركة إلى عجلتي الأرض الأماميتين لتكون ذاتية التوجيه وذلك في الجرار الزراعي.

ولتحقيق هذا الهدف تم اختيار جرارين من نفس النوع ومحراث حفار 7 سلاح صناعة محلية والجرار المستخدم ماركة بيلاروس (10M3- 6KM) ذات قدرة متوسطة متعدد الأغراض 65 حصان ميكانيكي (48.2 كيلووات) شائع الاستخدام تحت الظروف المصرية وأختبر ليناسب الفلاح المصري والمزارع المصرية وأستعمل الجرار قبل وبعد التعديل (وهذا التعديل يسمح بتقليل نصف قطر الدوران من 5 إلى 1.5 متر وكذلك تخفيض الاحتكاك بين العجلات الأمامية وأجهزة التوجيه) أختبر في معمل أبحاث الآلات والجرارات الزراعية بقسم الهندسة الزراعية كلية الزراعة- جامعة الأزهر.

ويمكن تلخيص أهم النتائج المتحصل عليها فيما يلي:

1- تأثير زاوية التوجيه الداخلية على قوة التوجيه:

قوة التوجيه النظرية تزداد بزيادة زاوية التوجيه الداخلية وقيمتها تتراوح بين (5.01-15.94 كيلو نيوتن) عند زوايا التوجيه الداخلية تتراوح بين (2- 50 درجة) على الترتيب .

2- تأثير الحمل وطول الأسطوانة الهيدروليكية على قوة وقدرة التوجيه:

1- قوة وقدرة التوجيه تزيد بزيادة تفكك سطح التلامس وقيم قوة وقدرة التوجيه النظرية تتراوح بين (0.86-6.592-7.027-7.393-7.482 كيلو نيوتن)، (0.145-1.062-1.188-1.25-1.265 كيلووات) وكذلك قيمتهما الفعلية (5.732-6.167-6.533-6.622 كيلو نيوتن)، (0.969-1.042-1.104-1.119 كيلووات) عند أسطح تلامس: خرسانية، طينية، متوسطة ورملية على الترتيب.

2- قوة وقدرة التوجيه تزداد بزيادة الحمل الواقع على العجل الأمامي وقيم قوة وقدرة التوجيه النظرية تتراوح بين (5.127-6.616 كيلو نيوتن)، (0.866-1.119 كيلووات) وقيم قوة وقدرة التوجيه الفعلية تتراوح بين (4.267-5.756 كيلو نيوتن)، (0.721-0.973 كيلووات) عند أحمال تتراوح بين (5.0-6.5 كيلو نيوتن) على الترتيب.

*طالب دراسات عليا، درجة الدكتوراه، ق. هـ. ز. - ك. ز. - ج. الأزهر .

**أستاذ الهندسة الزراعية- هـ. ز. - ك. ز. - ج. الأزهر .

***أستاذ متفرغ - هـ. ز. - ك. ز. - ج. عين شمس .

3- تأثير السرعة وطول الأسطوانة الهيدروليكية على قوة وقدرة التوجيه:

- 1- قوة وقدرة التوجيه تزيد بزيادة تفكك سطح التلامس وقيمتها النظرية تتراوح بين (0.86- 6.156-6.563-6.902-6.988 كيلونيوتن) و (0.145-1.041-1.109- 1.1661.181 كيلوات). وكذلك قيمتهما الفعلية تتراوح بين (5.296-5.703-6.042- 6.128 كيلونيوتن) و (0.9-0.963-1.021-1.036 كيلوات) عند أسطح تلامس: خرسانية، طينية، متوسطة ورملية على الترتيب
- 2- قوة وقدرة التوجيه تزيد بزيادة السرعة وقيم قوة وقدرة التوجيه النظرية تتراوح بين (4.518- 6.609 كيلونيوتن) و (0.764-1.117 كيلوات) وقيم قوة وقدرة التوجيه الفعلية تتراوح بين (3.658-5.749 كيلونيوتن) و (0.618-0.972 كيلوات) عند سرعات تتراوح بين (الأولى والرابعة) على الترتيب.

4- تأثير W/WB وطول الأسطوانة الهيدروليكية على قوة وقدرة التوجيه:

- 1- قوة وقدرة التوجيه تزيد بزيادة تفكك سطح التلامس وقيمتها النظرية تتراوح بين (0.86- 6.171-6.578-6.917-7.104 كيلونيوتن) و (0.145-1.045-1.112-1.17-1.201 كيلوات) وكذلك قيمتهما الفعلية تتراوح بين (5.311-5.718-6.057-6.544 كيلونيوتن) و (0.889- 1.056-1.025-0.966 كيلوات) عند أسطح تلامس: خرسانية، طينية، متوسطة ورملية على الترتيب.
- 2- قوة وقدرة التوجيه تزداد بزيادة W/WB وقيم قوة وقدرة التوجيه النظرية تتراوح بين (4.676-6.541 كيلونيوتن) و (0.79-1.107 كيلوات) وقيم قوة وقدرة التوجيه الفعلية تتراوح بين (3.816-5.681 كيلونيوتن) و (0.645-0.962 كيلوات) عند قيم W/WB تتراوح بين (0.39- 0.58 سم) على الترتيب، مما يؤدي إلى:-
- (1) توفير القدرة المفقودة في التوجيه
- (2) زيادة كفاءة الجرار.