

Influence of Urbanization on Water Quality of Wadi El-Arab Catchment Area- Jordan

Rakad A. Ta'any¹

ABSTRACT

This research paper deals with the hydrological and hydrochemical and bacteriological characteristics of Wadi El-Arab catchment area. The study area covers an area of about 267 km² and lies between 208 –230 East, and 210-230 North (Palestine Grid). The outcropping rocks in the area are sedimentary rocks of the Upper Cretaceous, Lower Tertiary and Recent deposits. The average annual rainfall in the whole catchment area ranges between less than 200 mm to more than 800 mm. The runoff ranges between 1.44 million cubic meters (MCM) to 72.89 MCM. A dam was constructed on Wadi El-Arab catchment area in 1987, with a total capacity of about 20 MCM to collect flood and base flow for irrigation in the Jordan Valley area. There are more than 20 groundwater wells were drilled in the catchment area and six major springs; most of the wells water are used for irrigation purposes. The average discharge of the springs ranges between 0.81m³/h and 592.2m³/h and the yield of the wells range between 3 m³/h and 6000 m³/h. Water samples from the six springs and seven wells have been collected to study the influence of Irbid Wastewater Treatment Plant (WWTP) effluent on the groundwater quality and to classify the water of springs and wells quality according to their chemical composition furthermore, to study the quality of the springs and wells chemistry and bacteriologically. The results show that the chemical constituents and physical parameters of the studied springs and wells are within the permissible limits according to the World Health Organization (WHO) and Jordan Standards, and they are suitable for domestic and drinking water purposes. The classification of springs and wells water based on hardness: all springs and wells are classified as very hard water. According to the U.S Salinity Laboratory Classification, the springs and wells water were classified into two groups: Barruqa, Wadi Zahar Springs and Wadi El-Arab Well (6) are classified as C₂-S₁, while other springs and wells are classified as C₃-S₁. The bacteriological analyses indicate that the studied wells are non-polluted by total coliform and faecal coliform.

Keywords: Hydrological, bacteriological, El – Arab catchment, groundwater, dam.

INTRODUCTION

The naturally imposed semi-aridity of Jordan entails the country in limited amounts of rainfall and hence limited surface and groundwater resources. During the

last few decades population growth, industrialization projects and improving standards of living not have led to increasing water use and over exploitation, but also to deteriorating water qualities as a result of the various human activities .Due to all of this a critical need for more drinking water is born,(MWI, 2011).

Water resources in Jordan are scarce and expensive to exploit. More than 80% of Jordan receives an annual average rainfall of less than 100 mm (Ta'any and Al-Zu'bi, 2007). Surface water resources are very limited and depend on rainfall as the major water source. Water resource planning and allocation involve increasing difficult choices between the requirements of competing users. Municipal and industrial water requirements have increased sharply, as the population has increased and increasing urbanization and rising incomes have brought increased demands for water.

Pollution is considered as the most important problem facing the world in general and Jordan in particular long time ago. This issue is still increasing to be at the top of all problems, which needs a scientific solution as soon, as possible to protect the water resources and the surrounded environment. Surface and groundwater are largely polluted, because of the dramatic life development particularly the industrial aspects (Haddadin, 2005).

In view of the increasing interest for water resources in Jordan to meet the rapidly growing demands, the need to protect the water from deterioration is becoming a must. Accordingly, Water samples from the major six springs and seven wells have been collected to study the influence of Irbid Wastewater Treatment Plant (WWTP) effluent on the groundwater quality and to classify the water of springs and wells quality according to their chemical composition and to study the quality of the springs and wells chemistry, physically and bacteriologically.

MATERIALS AND METHODS

2.1 Location of the study area

Wadi El-Arab Catchment Area is situated between the coordinates 208-230 E and 210-230 N (Palestine Grid) and covers an area of about 267 Km², (Figure .1).

¹ Al-Balqa' Applied University, Faculty of Agricultural Technology, Dept. Water Resources and Environmental Management, Al-Salt, Jordan.
Rakad A. Ta'any (*Corresponding Author):
e-mail: rakad.ayed@yahoo.com,
Tel.: +962776361225 Fax: +96253530469
Received February10, 2013, Accepted March10, 2013

The general shape of the basin is oval with the longer axis oriented SE-NW direction. The general slope of the area is from East to West. The highest elevation in Wadi El- Arab basin is about 850 m near Irbid City and the lowest elevation is - 170 m at the riverbed of Wadi Al-Arab dam site.

The Wadi El-Arab flows through a deep V- Shaped valley to the confluence with Wadi Zahar, the biggest tributary of Wadi El-Arab, situated at about 2 Km upstream of dam site. The average amount of precipitation ranges from 500 mm over the highlands west of Irbid, to 350 mm in the Jordan Valley.

The average discharge of Wadi El-Arab is around 28 MCM/year equally distributed between flood and flows and the potential evaporation ranges from 2000 mm/year in the northwest, to 2400 mm/ year in the southwest of the catchment, (Water Authority, 2009).

A dam was constructed on Wadi El-Arab catchment area in 1987, with a total capacity of about 20 MCM to collect flood and base flow for irrigation in the Jordan Valley area. Only in the wet year 1991/1992, the dam was filled with water from its own catchment area. In the other water years, water pumped from King Abdullah Canal to the dam during the dry season.

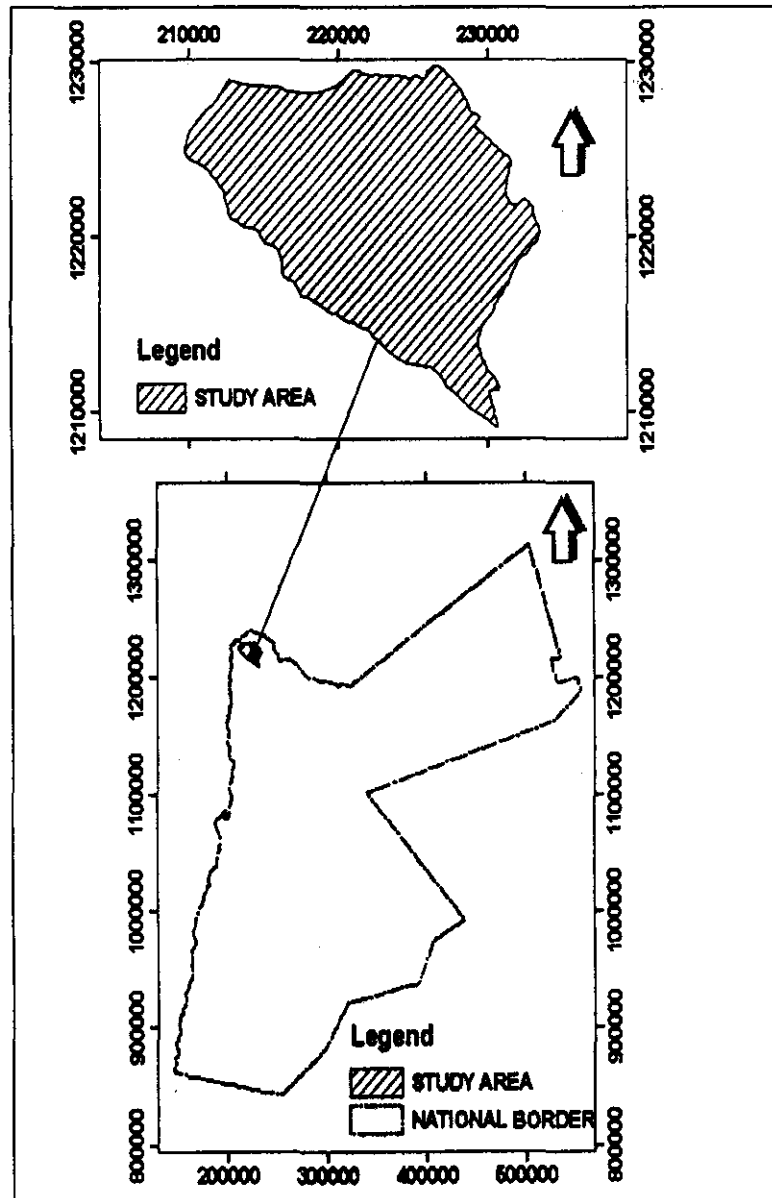


Figure 1. Location Map of Wadi El Arab Basin in Jordan

However, the expanding of Irbid City westward into the catchment may put an increasing pressure on the quality of the water collected in the dam. The Wastewater Treatment Plant for Irbid City was constructed at the upper reaches of Wadi El- Arab. The effluent of the treatment plant is piped to bypass the dam, and so flood waters still enter the treatment plant and wash its contents and wastes along Wadi El-Arab into the dam reservoir, which negatively affecting its water quality.

2.2 Drainage and Topography

Wadi El-Arab is situated on the East Bank of the Jordan Rift Valley about 10 Km south of Lake Tiberius,

occupying an area of 267 Km² (Figure .2). Wadi El-Arab originates near Irbid and runs westward to pour into the Jordan River.

The highest spot is 850 m south of Irbid, and lowest spot is 200 m near North Shauna. The deep V- shaped is formed in the mid upstream parts, where as the Wadi meanders in wide-open valley in the downstream river terraces, were formed 100 m to 150 m wide, and under the cliffs cut by side erosion on both banks. Wadi Zahar, a big tributary of the Wadi El- Arab, forms rather a straight valley trending from south to north. The confluence to the Wadi El-Arab is located about 1.7 Km upstream from the dam site, (Ghrefat, 1999).

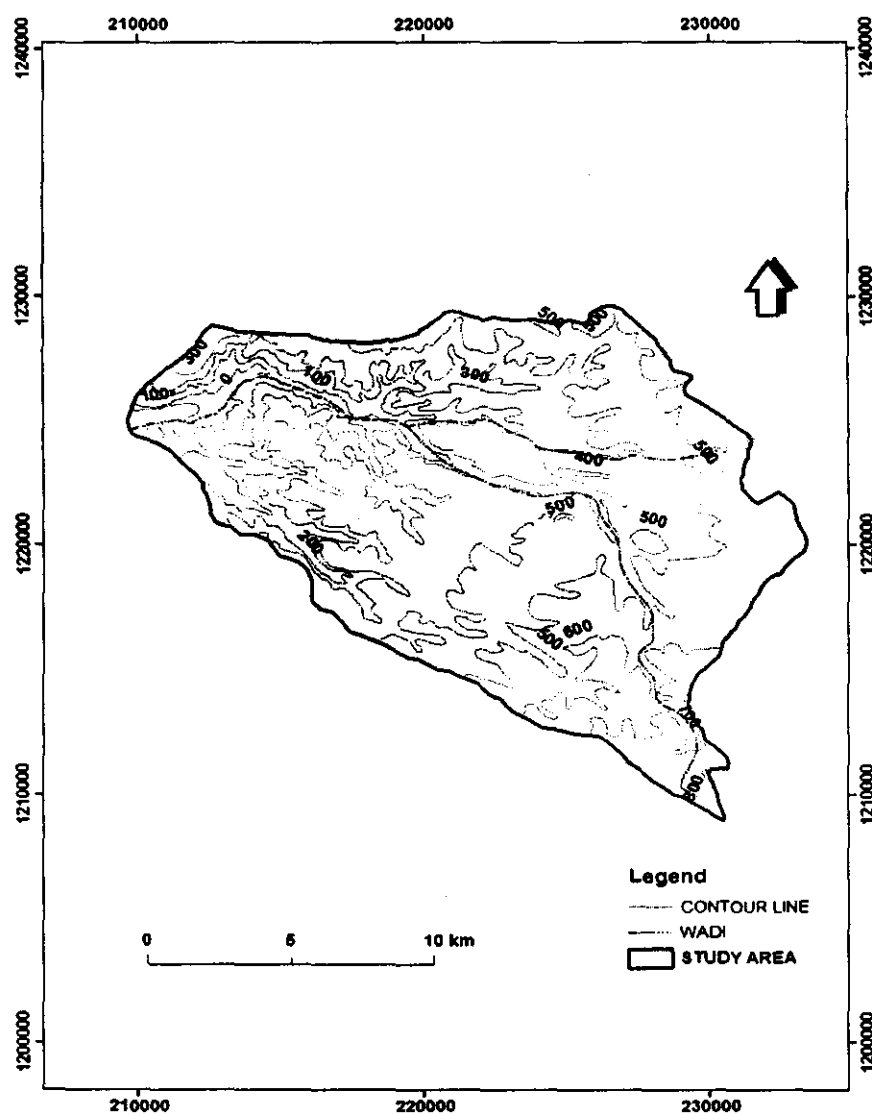


Figure 2. Topographic Map of Wadi El-Arab Basin

2.3 Hydrogeology

Wadi El-Arab basin is situated adjacent to the Jordan River Valley. The geological structure and tectonic features in the Wadi El Arab basin is highly related to the structure of Jordan Rift Valley. The geological successions in Wadi El-Arab hydrogeologically subdivided into lithostratigraphic units, which form aquifers and aquicludes.

Amman Wadi Es - Sir Formation (B_2/A_7) is the main aquifer system in Wadi El-Arab Basin. The groundwater of this basin is described as unconfined aquifer system in the basin. There are six wells in Wadi El-Arab, tapping the aquifer at various depths, in addition to five springs issue from the same aquifer. According to (Salem, 1999), the transmissivity of the (B_2/A_7) aquifer ranges from $9 \text{ m}^2/\text{day}$ to more than $900 \text{ m}^2/\text{day}$. The storage coefficient of this aquifer in the confined condition vary from 10^{-3} to 10^{-5} , while the specific capacity vary from less than 0.01 L/s/m to more than 50 L/s/m . The permeability ranges from 0.01 to more than 100 m/day , (MWI, 2009).

The aquifer system receives two types of recharge: direct and indirect. The direct recharge occurs as rainfall entering into the aquifer, while the indirect recharge takes place along wadis due to flood flows or via the overlying Quaternary Deposits. Tables (1 and 2) show the main wells and springs exist in the basin. Aquifers and aquitards as well as the soil cover make direct recharge as infiltration from the rainfall limited to the outcrops of the aquifer. The B_2/A_7 crops out in the eastern and southern border of the Basin, where direct recharge occurs (Fig 3).

The main mechanism of groundwater movement is by fracture flow. Regional groundwater movement within the Amman Wadi Es-Sir (B_2/A_7) aquifer mostly follows the regional dip to the west. Groundwater

movement generally depends on the hydraulic conductivity and the hydraulic gradient. Groundwater elevations are highest in the extremely north of the catchment area and range from more than 800 m above the mean sea level (a.m.s.l) to less than minus 100 m . Figure 4, shows the flow-net map of the Upper Aquifer System (B_2/A_7) in the basin. This figure shows that the flow direction is mainly from east to west.

2.4. Hydrology

2.4.1 Determination of the Average Areal Rainfall

Wadi El Arab basin has a predominantly Mediterranean type climate, characterized by hot dry summers and cool to cold rainy winters. As in most semi-arid areas, temperatures exhibit large seasonal and diurnal variations, with absolute daily temperatures ranging from a maximum of around 37°C in August to -3°C in January, (JMD, 2010). Rainfall generally begins in October and lasts in May, the remaining months of the year are dry. Isohyetal method was used to determine the mean rainfall precipitated over the basin. The annual precipitation decreases across the catchment area from the northwest to southeast from over 450 mm to less than 300 mm (Fig 5). In summer, the seasonal low pressure over the eastern Mediterranean area and Arabian Gulf creates westerly to northwesterly winds over Jordan and is associated with high temperatures and no rainfall during the months June to September. As the pressure system changes in autumn and the seasonal trough migrates to the south – east, the development of Mediterranean depressions brings in continental air from the Asiatic Steppes and warmer moist air from the Mediterranean Sea, causing falling temperatures and the onset of winter frontal rains (Oct-Nov to April-May). Towards the end of winter season, thunderstorms are often associated with unstable air at higher altitudes.

Table 1. The locations and depths of the studied wells*


Well Name	Palestine Grid Coordinates		Altitude (m)	Aquifer type	Total Depth (m)
	E	N			
Wadi Al-Arab well No.1	211.947	1224.19	11.00	B_2/A_7	703
Wadi Al-Arab well No.2	212.067	1225.150	17.00	B_2/A_7	407
Wadi Al-Arab well No.3	212.650	1225.600	-20.00	B_2/A_7	257
Wadi Al-Arab well No.4	213.300	1226.500	26.80	B_2/A_7	750
Wadi Al-Arab well No.5	212.850	1222.550	50.00	B_2/A_7	375
Wadi Al-Arab well No.6	213.032	1222.460	80.00	B_2/A_7	303
Kafr Asad Exploration well	220.200	1221.130	337.00	B_2/A_7	341

*Source: MWI, 2011

Table 2. The locations and type of aquifer types of the studied springs*

Spring Name	Palestine Grid Coordinates		Altitude (m)	Aquifer type
	E	N		
Barruqa	218.6	227.6	300	B ₂ /A ₇
Um Jum	213.8	226.2	100	B ₂ /A ₇
Rood El Tarqaba	213.8	226.2	78	B ₂ /A ₇
Tell Zeraa'	211.9	225.1	-20	B ₂ /A ₇
Um Qeis	213.5	228.2	220	B ₃
Zahar	213.05	222.5	75	B ₂ /A ₇

* Source: Ministry of Water and Irrigation, (MWI, 2011).

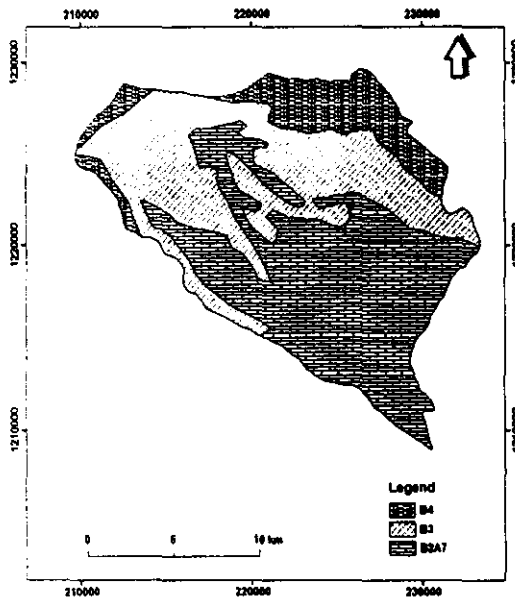**Figure 3. Geologic Map of the Basin**

2.4.2 Determination of Runoff

The determination of flows was done by applying the United States soil conservation service (SCS) (curve number) approach to the available rainfall data. This method takes in consideration the antecedent moisture conditions (AMC), the initial abstraction of rainfall, and the land use. The general equation relating the accumulated runoff to accumulated rainfall is:

$$P_e = \frac{(P - I_a)^2}{P - I_a + S} \quad (1)$$


Where:

P_e : the depth of excess precipitation depth or direct runoff in inches

P : the depth of precipitation in inches

I_a : The initial abstraction before ponding in inches

S : the potential maximum retention depth in inches

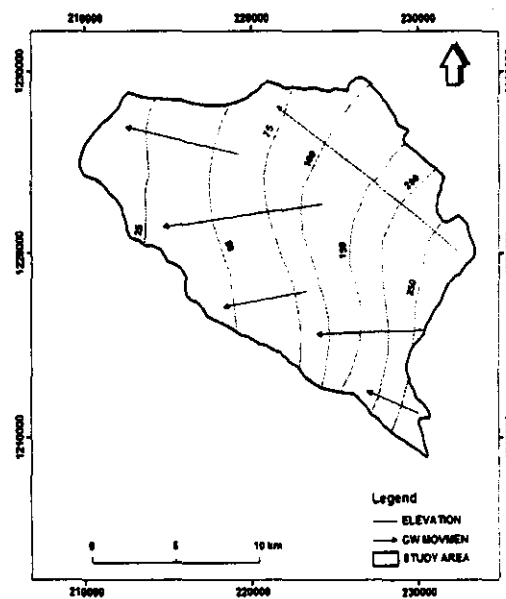**Figure 4. Flow-net map of the Basin**

By studying the results of many small experimental watersheds, an empirical relation was developed as:

$$I_a = 0.2S \quad (2)$$

On this basis

$$Q = \frac{(P - 0.2S)^2}{P + 0.8S} \quad (3)$$

The curve number and S are related by:

$$S = \frac{1000}{CN} - 10 \quad (4)$$

The curve number (CN) is defined in terms of the watershed land cover and hydrologic soil group types, (SCS, 1985). This number can be obtained from a graphical solution. A higher number means that great amount of direct runoff is expected from a storm.

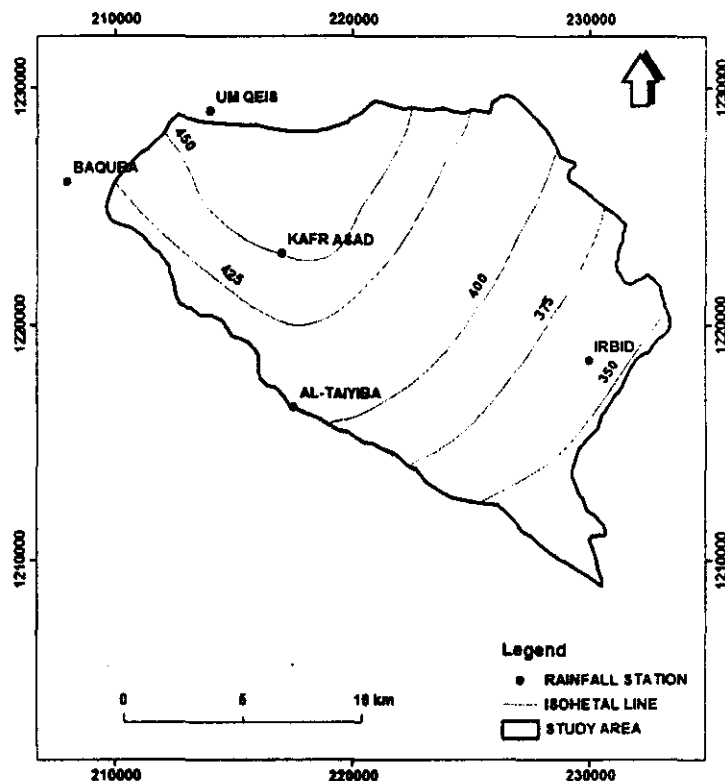


Figure 5. Isohyetal Map of Wadi El Arab Basin

2.4.2 Chemical analyses of water samples:

Water samples from six springs and seven wells have been collected and analyzed in Water Authority of Jordan (WAJ) central laboratories, to study the influence of Irbid Wastewater Treatment Plant (WWTP) effluent on the groundwater quality and to classify the water of springs and wells quality according to their chemical composition furthermore, to study the quality of the springs and wells chemistry, physically and bacteriologically. For Ca^{2+} , Mg^{2+} , Na^+ , K^+ Varian AAS has been used and for HCO_3^- and Cl^- titration method is used while for SO_4^{2-} and NO_3^- UV spectrophotometer is used. The total hardness (TH) in mg/l was calculated as follows:

$TH = 2.5Ca + 4.1Mg$, (Todd, 1980) and the concentrations of Ca and Mg are in mg/l.

The accuracy of the analysis has been checked using the ionic balance according to Appelo and Postma (1996). The balance was found to be less than 5%, which indicates that the analysis is satisfactorily accurate.

RESULTS AND DISCUSSIONS

Jordan economic growth, industrialization, and urbanization – accompanied by inadequate infrastructure investment and management capacity – have all contributed to widespread problems of water scarcity and water pollution throughout the country. Scarcity of water resources and their pollution are considered gravest environmental challenge facing Jordan, due to arid to semi-arid climate, high population growth and depletion of water resources. These issues will increase the gap between water demand and supply. Besides the stress on the water resources, which are considered to cover the demand of population and development of agricultural activities.

3.1 Hydrological characteristics:

Runoff estimation in un-gauged catchment is a challenge for the hydrological engineers and planners. For any hydrological study on an un-gauged watershed, a methodology has to be appropriately selected for the determination of runoff at its outlet. Several methods have been used to estimate the runoff from a watershed.

In this research The US Department of Agriculture, Natural Resources US Soil Conservation Service Curve Number (SCS, 1985) was used to calculate the runoff in Wadi El-Arab catchment. The Curve Number method (SCS-CN) of estimating rainfall excess from rainfall depth is widely used in applied hydrology. Based on field observation, geologic conditions, soil type, vegetation cover and the topography of the study area, the curve number 70 is found to represent the normal condition for Wadi El- Arab Catchment Area. Then formulae discussed in section 2.4.2 were used to estimate the runoff from each effective storm for the whole catchment.

Estimation of evaporation rate and total evaporation over a water year is of great importance in the water management problems, especially in arid region. The potential evapotranspiration was computed by applying Penman Formula, (Penman, 1963) as mentioned previously, which appears to be the most suitable and had been widely used with satisfactory results in various parts of the world, particularly in arid and semi-arid areas as the case in Wadi El Arab catchment area. The potential evapotranspiration (ET) was computed for the period from 1997 to 2009 .The average annual evapotranspiration (ET) according to Penman was found to be 154.84 MCM, 109.24 MCM and 56.84 MCM in the wet, normal and dry conditions respectively. The rate of evaporation ranges between 71.2 percent in the wet year and 94.20 percent in the extremely dry water year.

The infiltration amounts were estimated according to the following equation:

$$\Delta = P - (E + R) \pm I_a$$

(Fetter,1988).....(5).

The direct infiltration was calculated annually by subtracting the sum of daily runoff and the sum of daily evapotranspiration (E) and initial abstraction (I_a) from the annual rainfall.

The average annual recharge to the upper aquifer of Wadi El Arab catchment was calculated to be about 7.01 MCM. The results of the water balance calculations for the whole catchment are presented in Table (3). Also the maximum recharge is 16.31 MCM and the minimum recharge is 2.11 MCM. The infiltration rate ranged between 3.5 percent and 7.5 percent.

Table 3. Calculated water balance for Wadi El Arab catchment area

Water Year	Rainfall MCM*	Runoff MCM	Evaporation MCM	Infiltration MCM	Runoff rate%	Evaporation rate%	Infiltration rate %
Wet (1997/1998)	217.47	46.32	154.84	16.31	21.3	71.2	7.5
Normal (1996/1997)	132.25	16.00	109.24	7.01	12.1	82.6	5.3
Dry (2004/2005)	60.34	1.39	56.84	2.11	2.3	94.2	3.5

* MCM (Million cubic meter)

3.2 Water Quality

The geochemical properties of groundwater generally depend on those of the recharge water (atmospheric precipitation, inland surface water, seawater) and on subsurface geochemical process. The quality of any type of water reflects its potential use for domestic, industrial and irrigational purposes, (Al Nasir and Batarseh, 2009). Water quality assurance is one of the most important perquisites for water use allocation. The chemical and biological compositions of water are derived from many sources in the investigated area are discussed below.

3.2.1 Water Quality for Domestic Water

The quality of water resources depends on the intended use such as domestic, irrigation and industrial uses. Several parameters were calculated to determine the suitability of the springs and wells water quality for domestic and irrigation purposes.

The suitability of the spring water for domestic purposes was determined by comparing the concentration of constituents with the World Health Organization (WHO, 1993) guidelines and Jordanian standards for drinking water, (JS, 1997). All springs and wells in the study area are fit with WHO guidelines and Jordanian standards and can be used for domestic purposes. The long - term average electrical conductivity (EC) values range between 625 $\mu\text{S}/\text{cm}$ at Wadi Zahar spring and 945.6 $\mu\text{S}/\text{cm}$ at Um Jurn spring. While EC- values range between 570 $\mu\text{S}/\text{cm}$ at Wadi El-Arab Well (5) and 1500 $\mu\text{S}/\text{cm}$ at Kufr Asad Exploration well. In addition, the long-term average nitrate concentrations range between 4 mg/l at Tell Zeraa' spring and 32.3 mg/l at Um Jurn spring. While nitrate concentrations range between 1.4 mg/l at Wadi El-Arab Wells (2 and 3) and 15.9 at Kufr Asad exploration well, Tables (4 and 5) and Figs (6,7,8 and 9).

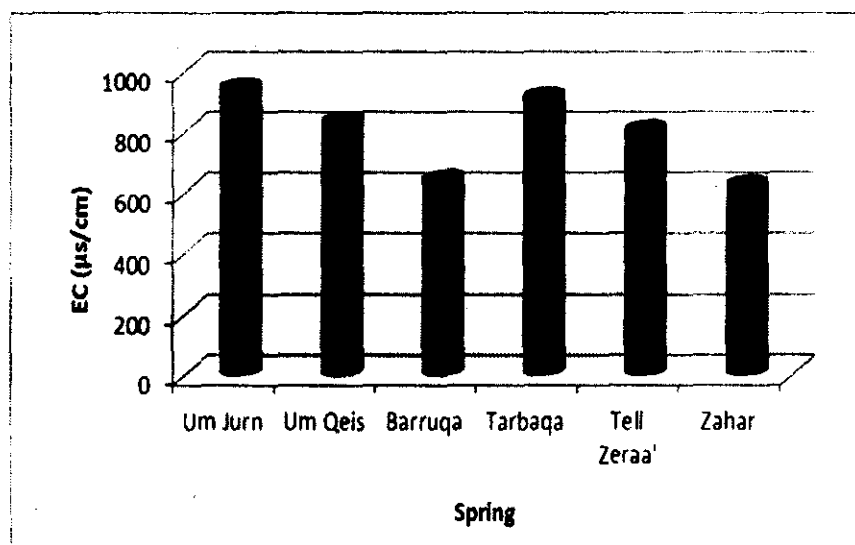
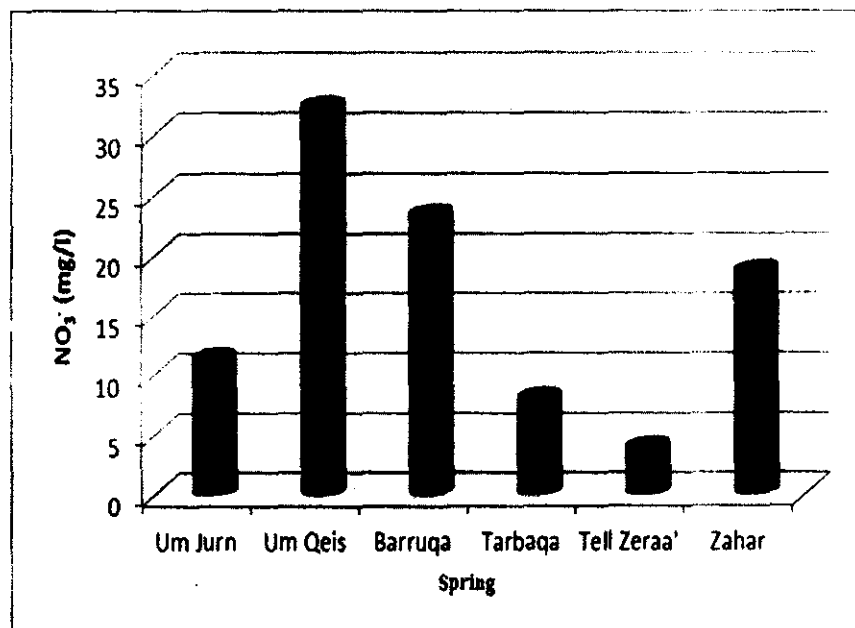
The classification of water hardness was achieved based on Sawyer and McCarty, (1967) classifications as shown in table (6). Generally, all springs water and wells water are classified as very hard water. This is due to the nature of limestone aquifer. Tables (7 and 8) represent the classification of the wells water based on their hardness.

Table 4. Average Electrical Conductivity and Nitrate Concentrations for the Major Springs

Parameters	Um Jurn	Um Qeis	Barruqa	Tarbaqa	Tell Zeraa'	Zahar
EC(μ S/cm)	945.6	834.2	642.9	914.6	806.1	625
NO ₃ ⁻ (mg/l)	11.4	32.3	23.4	8.1	4	18.7

Table 5. Average Electrical Conductivity and Nitrate Concentrations for the Major Wells

Parameters	Kufr Asad	W. El-Arab.1	W. El-Arab.2	W. El-Arab.3	W. El-Arab.4	W. El-Arab.5	W. El-Arab.6
EC(μ S/cm)	1308.5	869.7	830.1	842.6	931.2	770.3	795.0
NO ₃ ⁻ (mg/l)	15.9	1.5	1.4	1.4	1.6	11.7	14.1

**Figure 6. Fluctuation of Electrical Conductivity for the Major Springs****Figure 7. Fluctuation of Nitrate Concentrations for the Major Springs**

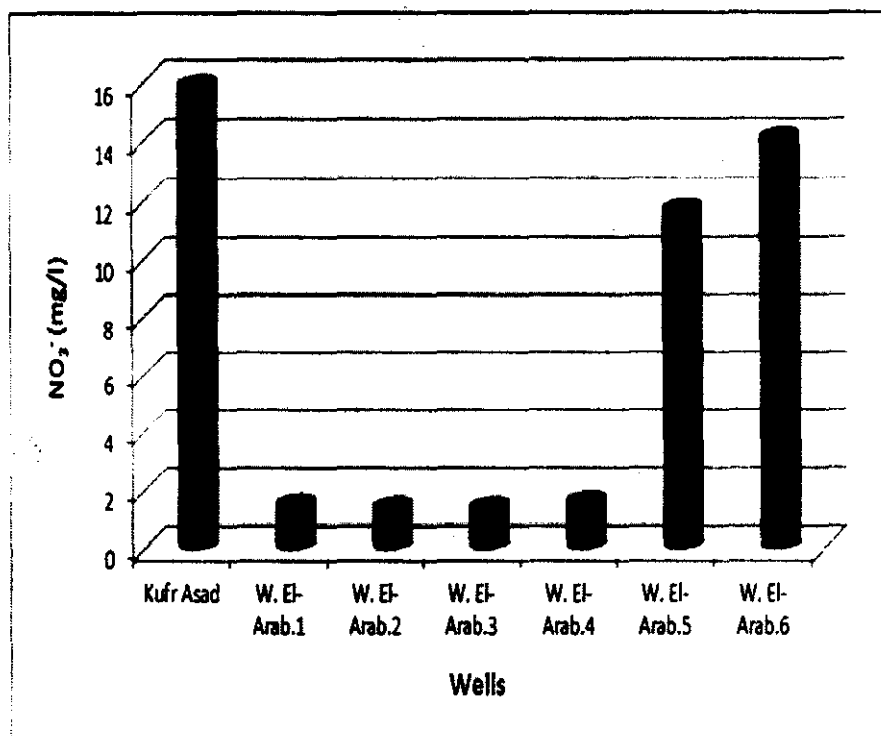


Figure 8. Fluctuation of Nitrate Concentrations for the Major Wells

Table 6. Classification of water based on hardness (Sawyer and McCarty, 1967)

Hardness as CaCO ₃ (mg/l)	Water class
0-75	Soft
75-150	Moderately hard
150-300	Hard
> 300	Very hard

Table 7. Classification of springs' water based on hardness

Spring name	Hardness as CaCO ₃ (mg/l)	Water class
Barruqa Spring	426.5	Very hard
Um Qeis Spring	385.8	Very hard
Um Jurn Spring	615.8	Very hard
Rood El Targaba Spring	575.7	Very hard
Tell Zeraa' Spring	549.4	Very hard
Wadi Zahar Spring	442.4	Very hard

Table 8. Classification of wells' water based on hardness

Well name	Hardness as CaCO ₃ (mg/l)	Water class
Kufr Asad Exp.well	385.8	Very hard
Wadi El-Arab well (1)	385.8	Very hard
Wadi El-Arab well (2)	385.8	Very hard
Wadi El-Arab well (3)	385.8	Very hard
Wadi El-Arab well (4)	385.8	Very hard
Wadi El-Arab well (5)	385.8	Very hard
Wadi El-Arab well (6)	385.8	Very hard

3.2.2 Irrigation Water

The suitability of water for irrigation is affected by its mineral constituents and their impacts on both plant and soil (Todd, 1980). The limiting factors concerning water quality for irrigation purposes are the salinity hazard and Sodium Adsorption Ratio (SAR). The SAR has a direct relation to the adsorption of sodium by soil and plants. The SAR is defined as:

$$SAR = \frac{Na}{\sqrt{\frac{(Ca + Mg)}{2}}} \dots\dots\dots (6)$$

Where;

Na⁺: meq/l; Ca²⁺: meq/l; Mg²⁺ meq/l

The classification of springs and wells water based on Salinity and SAR are listed in tables (7) and (8) respectively.

In respect of Tables (7) and (8) it can be observed that, the water of each springs, Barruqa and Wadi Zahar, in addition to the water of Wadi El-Arab Well (6) are classified as medium salinity hazard (C₂) and low sodium hazard (S₁), and the water of other springs and wells are classified as high salinity (C₃) and low sodium hazard (S₁).

3.2.2 Bacteriological Analyses

The bacteriological analysis is important for detecting biological pollution of groundwater. Most

pathogenic bacteria found in water are indigenous to the intestinal tract of animals and humans, but isolating them from natural water is difficult in the laboratory. Because bacteria of the coliform group are relatively easy to isolate and identify, standard tests to determine their presence or absence in a water sample are taken as a direct indication of the safety of the water for drinking purposes.

Coliform test results are reported as the most probable number (MPN) of coliform group organisms in a given volume of water. By analysis of a number of separate portions of a water sample, the MPN is computed from probability tables for this purpose, (Todd, 1980). The presence of total coliform is an index of bacteriological pollution in water samples

The collected wells water samples were analyzed in the laboratories of north water directorate, (Water Authority- Irbid). The results of bacteriological tests are listed in Table (9). According to the World Health Organization and Jordan standards, the water is considered suitable for drinking when the most probable number (MPN) for total coliform does not exceed 2.2 MPN per 100 ml, and the faecal coliform bacteria does not exist in the same 100 ml. According to the results shown in Table 9, the whole wells exist in Wadi El - Arab catchment are suitable for drinking.

Table 7. Classification of springs water use for irrigation based on salinity and (SAR)

Spring name	EC(μs/cm)	SAR	Class
Barruqa Spring	642.9	0.40	C ₂ -S ₁
Um Qeis Spring	834.2	0.92	C ₃ -S ₁
Um Jum Spring	945.6	0.90	C ₃ -S ₁
Rood El Tarqaba Spring	914.6	0.80	C ₃ -S ₁
Tell Zeraa' Spring	806.1	0.47	C ₃ -S ₁
Wadi Zahar Spring	625.0	0.44	C ₂ -S ₁

Table 8. Classification of wells water use for irrigation based on salinity and (SAR)

Wells name	EC(μs/cm)	SAR	Class
Kufr Asad Exploration well	1308.5	1.19	C ₃ -S ₁
Wadi El-Arab well (1)	869.7	0.59	C ₃ -S ₁
Wadi El-Arab well (2)	830.0	0.48	C ₃ -S ₁
Wadi El-Arab well (3)	842.6	0.49	C ₃ -S ₁
Wadi El-Arab well (4)	931.2	0.71	C ₃ -S ₁
Wadi El-Arab well (5)	770.3	0.44	C ₃ -S ₁
Wadi El-Arab well (6)	508.8	0.42	C ₂ -S ₁

Table 9. Bacteriological Analyses for the collected wells water samples

Wells name	Total Coliform MPN/100ml	Faecal Coliform MPN/100ml
Kufr Asad Exploration well	< 2.2	n.d*
Wadi El-Arab well (1)	< 2.2	n.d
Wadi El-Arab well (2)	< 2.2	n.d
Wadi El-Arab well (3)	< 2.2	n.d
Wadi El-Arab well (4)	< 2.2	n.d
Wadi El-Arab well (5)	< 2.2	n.d
Wadi El-Arab well (6)	< 2.2	n.d

* n.d: not detected

CONCLUSION

- The annual precipitation decreases across Wadi El-Arab catchment area from the northwest to southeast from over 450 mm to less than 300 mm.
- The rate of evaporation ranges between 71.2 percent in the wet year and 94.20 percent in the extremely dry water year.
- The infiltration rate ranges between 3.5 percent and 7.5 percent.
- All springs and wells in the study area are fit with WHO guidelines and Jordanian standards and can be used for domestic purposes.
- The long - term average electrical conductivity (EC) values ranged between 625 $\mu\text{S}/\text{cm}$ at Wadi Zahar spring and 945.6 $\mu\text{S}/\text{cm}$ at Um Jurn spring. While EC- values ranged between 570 $\mu\text{S}/\text{cm}$ at Wadi El-Arab Well (5) and 1500 $\mu\text{S}/\text{cm}$ at Kufr Asad Exploration well.
- The long - term average nitrate concentrations ranged between 4 mg/l at Tell Zeraa' spring and 32.3 mg/l at Um Jurn spring. While nitrate concentrations ranged between 1.4 mg/l at Wadi El-Arab Wells (2 and 3) and 15.9 at Kufr Asad exploration well.
- The springs and wells water were classified into two groups: Barraqa, Wadi Zahar Springs and Wadi El-Arab Well (6) are classified as $\text{C}_2\text{-S}_1$ while other springs and wells are classified as $\text{C}_3\text{-S}_1$ According to the U.S Salinity Laboratory Classification, Richard, (1954).
- The bacteriological analyses indicate that the studied wells are non-polluted by total coliform and faecal coliform.

REFERENCES

- Al Nasir, F, Batarseh M, 2009. Agricultural reuse of reclaimed water and uptake of organic compounds: Pilot study at Mu'tah University wastewater treatment plant, Jordan. *Chemosphere*, 72,(2008), 1203-1214.
- Appelo, C.A.J., and Postma, D. 1996. *Geochemistry, Groundwater and Pollution*. Published by A.A. Balkema, Brookfield, VT.
- Fetter CW, 1988. *Applied Hydrogeology*, 2nd edition. Merrill publishing Company, London, p 592.
- Ghrefat H. 1999. Hydrochemical and geochemical study of Wadi Al-Arab Dam and Wells: with special regard to the environmental pollution (MSc thesis). Yarmouk University.
- Haddadin, M. 2005. Water resources in Jordan, evolving policies for development, the environment, and Conflict Resolution. Washington DC, USA.
- JMD (Jordan Meteorological Department), 2010. Annual report, Ministry of Transport. Amman. Jordan.
- JS (Jordanian standards), 1997. Jordanian Drinking Water Standards JS 286/1997.
- MWI (Ministry of Water and Irrigation), 2009. Open files. Amman, Jordan.
- MWI (Ministry of Water and Irrigation), 2011. Water sector investment program in (1997-2011). Amman, Jordan.
- Penman, H. L., 1963. Natural evaporation from open water, bare soil and grass. *Royal Soc. London Proc., Ser. A, V.* 193, No. 1032, pp. 120-145.
- U.S Salinity Laboratory, 1954. Diagnosis and improvement of saline and alkali soils. U.S Department of Agriculture. Handbook No. 60, p 160.
- Salem, H.S., 1999. Determination of fluid transmissivity and electric transverse resistance for shallow aquifers and deep reservoirs from surface and well-log electric measurements. *Hydrology and Earth System Sciences* 3 (3), 421-427.
- Sawyer, C.N and McCarty, P.L. 1967. *Chemistry and Sanitary engineers*, second edition, McGraw-Hill, New York.
- SCS (U.S.A Soil Conservation Service), 1985. National Engineering Handbook Section-4. Hydrology, Soil Conservation Service, USDA.
- Ta'any, R. and Al-Zu'bi. Y. 2007. Rainfall network optimization in Jordan as an example of Mediterranean Sea region. *Journal of Food, Agriculture and Environment*. 5(2):284-288.
- Todd, D.K 1980. *Groundwater hydrology*, Second edition, 5353p, New York: John Wiley and Sons Inc.
- Water Authority of Jordan (WAJ), 2009. Open Files, Amman-Jordan.
- World Health Organization (WHO), 1993. Guidelines for Drinking Water Quality, 2nd Edition. Vol. 1- Recommendations. Geneva: 8-29 and 120-130.

الملخص العربي

تأثير التوسع العمراني على نوعية مياه حوض وادي العرب-الأردن

ركاد عابد طعان

تم جمع عينات مياه من الينابيع الرئيسة الواقعة في حوض وادي العرب وعددها ستة ومن سبعة آبار مياه جوفية لدراسة تأثير تدفق مياه الصرف الصحي المعالجة الخارجة من محطة اربد والواقعة في المنطقة العلوية من الحوض على نوعية المياه الجوفية وتصنيف نوعية مياه الينابيع والآبار وفقاً لتركيبتها الكيميائية. بالإضافة إلى دراسة نوعية الينابيع والآبار، من الناحية الفيزيائية والكيميائية والبكتيرية.

أشارت نتائج التحاليل أن العناصر الكيميائية والفيزيائية التي تتكون منها مياه الينابيع والآبار المدروسة تقع ضمن الحدود المسموح بها وفقاً لمعايير منظمة الصحة العالمية ومعايير الأردن لياه الشرب، وكانت ملائمة لأغراض الشرب والمياه المنزلية. كما تم تصنيف جميع مياه الينابيع والآبار حسب تصنيف سويار ومكارتني لعسورة المياه مياه عسرة جداً.

كما تم تصنيف مياه الينابيع والآبار المدروسة وفقاً لتصنيف الولايات المتحدة -مختبر الملوحة، إلى مجموعتين: مجموعة نبع بروقة ونبع وادي زحر وبئر وادي العرب رقم (٦) تقع ضمن المجموعة S1-C2 بينما كانت الينابيع والآبار الأخرى تقع ضمن مجموعة S2 C3 -. كما أشارت التحليلات البكتيولوجية أن مياه آبار المياه الجوفية المدروسة غير ملوثة بكتيريااً بالعصويات القولونية الكلية وعصيات القولون البرازية.

تناول هذه الورقة البحثية الخصائص الهيدرولوجية والهيدروكيميائية لمنطقة حوض وادي العرب المائي. تبلغ مساحة منطقة الدراسة حوالي ٢٦٧ كم^٢ وتقع ما بين ٢٠٨ - ٢٣٠ شرقاً وبين ٢١٠ - ٢٣٠ شمالاً (حسب إحداثيات فلسطين). تتكشف في منطقة الدراسة الصخور الرسوبية والتي يعود عمرها، للعصر الطباشيري العلوي والعصر الثلاثي السفلي والرسوبيات الحديثة. يتراوح معدل هطول الأمطار السنوية التي تسقط على كامل حوض وادي العرب ما بين أقل من ٢٠٠ ملم إلى أكثر من ٨٠٠ ملم. كما يتراوح الجريان السطحي بين ١.٤٤ مليون متر مكعب وب ٨٩.٧٢ مليون متر مكعب. تم بناء سد عند مخرج منطقة وادي العرب في عام ١٩٨٧، بسعة تخزينية تبلغ حوالي ٢٠ مليون متر مكعب تتكون من حجم الفيضانات التي تحصل شتاءً ومن الجريان الدائم لاستخدامه للرعي في منطقة وادي الأردن.

تم حفر أكثر من ٢٠ بئر مياه جوفية كما يوجد ستة ينابيع رئيسة في حوض وادي العرب، وتستخدم مياه معظم آبار المياه الجوفية لأغراض الري. و يتراوح تصريف الينابيع بين ٠.٨١ م^٣ / ساعة و ٥٩٢.٢ م^٣ / ساعة كما يبلغ إنتاجية آبار المياه الجوفية بين ٣ م^٣ / ساعة و ٦٠٠٠ م^٣ / ساعة.