

## SOLAR DESALINATION SYSTEM USING PARABOLIC COLLECTOR

Hendy, Z. <sup>\*</sup>; M. M. Mostafa <sup>\*</sup>; M. A. Elnono <sup>\*</sup>; A. Lasheen <sup>\*\*</sup>

Z. S. Abdel-Rehim <sup>\*\*\*</sup>

### ABSTRACT

*The aim of this study is to provide a modification unit to enhance the performance of the solar desalination. The modification of the conventional solar still by using the parabolic trough and simple heat exchanger which installed in the basin bottom as closed loop with the solar collector is presented in this work. Oil is used as working fluid in the heat exchanger which has high thermal properties. Black copper serpentine of the heat exchanger is immersed in basin water on the bottom of the still basin. It is extremely attached with thermally insulated pipelines through the trough. The oil is forced to flow using small pump. The parabolic trough is tracking the sun using simple mechanism to collect the highest amount of solar radiation and to increase the efficiency of the proposed solar desalination system. The saline water is heated directly by solar radiation and by the simple heat exchanger's hot oil. Many experiments are carried out on (September, October and November 2012). The experimental setup was designed and installed at Solar Energy Laboratory, Department of Agricultural Engineering, Faculty of Agriculture, Ain Shams University, Cairo ( $\phi=30^{\circ}N$ ). The forecast of the typical climatic conditions of the experimental Cairo site at the selected days are obtained from the Meteorological Egyptian Authority. The comparison between the performance of the conventional and the modified solar desalination still is presented. The economic study of the present system is determined. The results show that fresh water productivity is increased by an average of 41.07 %, while the total thermal efficiency of the modified system was 23% in the case of using modification still (active).*

**Keywords:** Forced flow; oil heat exchanger; parabolic trough; solar still; solar desalination; solar tracking systems.

---

<sup>\*</sup> Agric. Eng. Dept., Fac. of Agric., Ain Shams Univ.

<sup>\*\*</sup> Mech. Eng. Dept., Fac. of Eng., Banha. Univ.

<sup>\*\*\*</sup> Mech. Eng. Dept., National Research Center. Cairo.

## 1- INTRODUCTION

The shortage of pure drinking water is an urgent problem that is continuously increased due to population growth, and changes in weather conditions, and affected many developing countries in the world especially in remote areas. The Per capita water in Egypt is 700 ( $\text{m}^3/\text{inhabitant}/\text{year}$ ), (FAO). Therefore, with increasing water demand for agriculture and domestic usage with limited fresh water resources, the solar desalination seems to be the best solution for this problem. Egypt has a high potential for the production of solar energy that can be considered as a reliable energy source even during the winter season. The average solar energy has a magnitude of 5 to 8  $\text{kWh}/\text{m}^2$  per day and sunshine duration per year extends to about 3000 hours Sayigh, (1977), Egypt also has long coastal areas (Red and Mediterranean seas).

There are different types of solar still systems can be found in the literature. Badran et.al., (2005) investigated a basin-type solar still and a flat plate collector that were connected together to study the effect of augmentation on still productivity. They found that the mass of distilled water using augmentation was increased by 52%. Another experimental investigation was carried out by Elnono (2012) to study and test a single-slope solar still that was connected to a flat plat collector (active solar still) through a heat exchanger on the bottom of the still basin, and a small size pump to circulate the working fluid (distilled water) in a closed and separated loop from the basin water to transfer extra thermal energy to the solar still. He indicated that the average daily production rate of the active solar still was around 1.83 times higher than the passive solar still, while the thermal efficiency of the active solar still was lower than passive solar still by an average 3.9%. A modification unit includes a solar parabolic trough (solar energy concentrator) with focal pipe and simple heat exchanger (serpentine) was developed by Abdel-Rehim and Lasheen, (2007). Oil was selected as working fluid. The oil was forced to flow using small pump which may be powered by PV system. The saline water is heated directly by solar radiation and also, by the oil in the heat exchanger as the oil cycle. The results showed that fresh water productivity was increased by an average of 18%, due to the modification.

An active solar desalination system should be characterized by the following:

1. Enhancement of solar desalination performance.
2. Using the solar energy sustainable as alternative and green energy.
3. Low cost of operation and maintenance.
4. High productivity of fresh water compared to other types.
5. Increasing the efficiency of solar desalination system under Egyptian condition all around the year.

## **2- MATERIALS AND METHODS**

### **2.1 Experimental work**

Two experimental set-ups are built; one of them was a passive solar still and the other was an active solar still under case study. The modification of the active solar still is done using the parabolic trough collector (solar concentrator) and simple heat exchanger, which installed on the basin bottom as closed loop with the solar collector.

Oil is selected as a working fluid, which has high thermal properties ( $\rho$ ,  $C_p$  and  $K$ ). The solar energy is used through the glass cover of the still and the parabolic trough system. Figures (1 and 2) show schematic diagram of the experimental set-up and photography picture, of the presented work, respectively, of the active and passive solar stills.

Figure (3) shows the flow diagram of the active system processes.

#### **2. 1.1. Still basin**

Two solar stills are built for active and passive systems. They had the same size and dimensions. Each of them had L shape basin configuration, square cross sectional area of  $1\text{m}^2$  ( $1\text{m}\times 1\text{m}$ ) and made of galvanized iron sheet of 2 mm thickness. The basin water depth for the stills was 5 cm. Saline water ( about 28608 ppm, 2.5 gm of sea salt per liter of tap water) is used as feed. They are oriented due North-South direction. Glass cover made of pure transparent material of 6 mm thickness is used as a condensing surface. The angle of inclination of the front glass cover is  $30^\circ$  with the horizontal level to receive the highest amount of solar radiation. A rubber seal is placed between the glass inside by ordinary matt cover and the still, to prevent the thermal energy leakage to the

surrounding. The external sides, bottom of the still and pipe lines are thermally insulated by 25 mm thickness glass wool to minimize the thermal losses to the ambient. The sides and bottom of the still are coated from black paint.

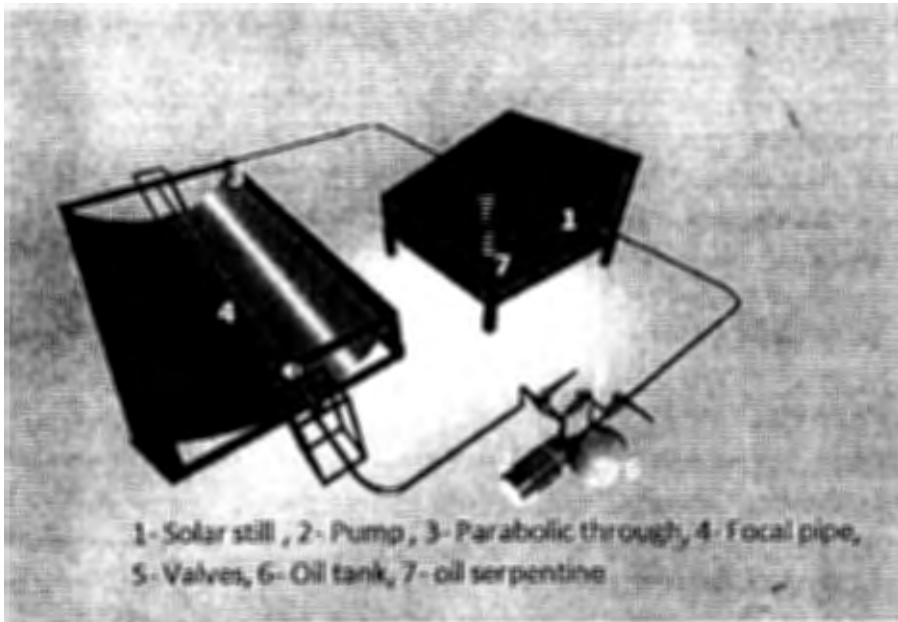


Fig. (1): Schematic diagram of experimental set-up of the modified system

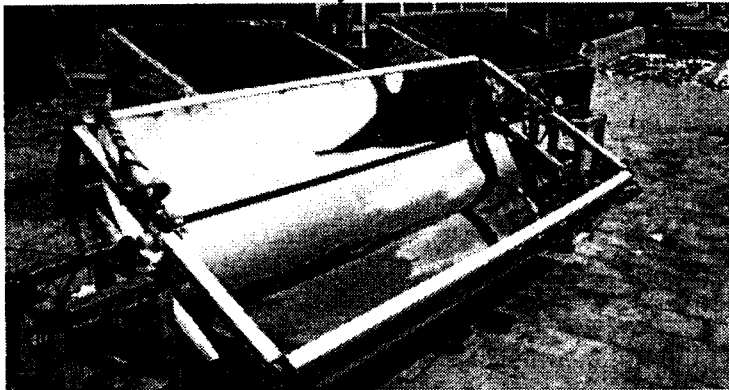


Fig . (2): Photography picture of the active and passive solar still

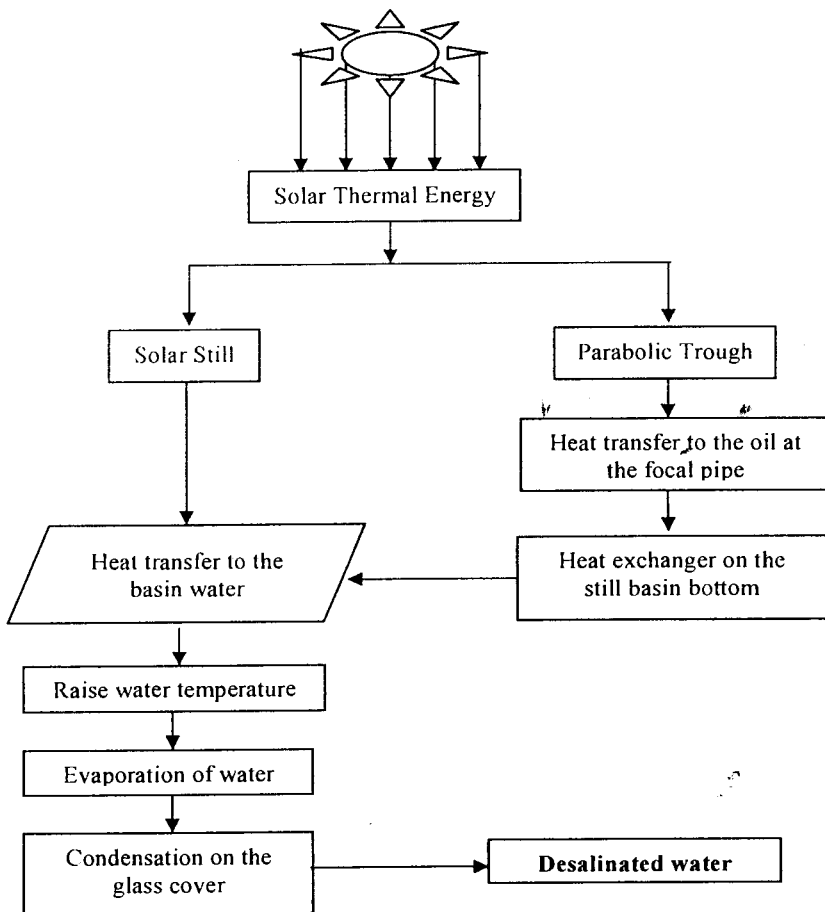
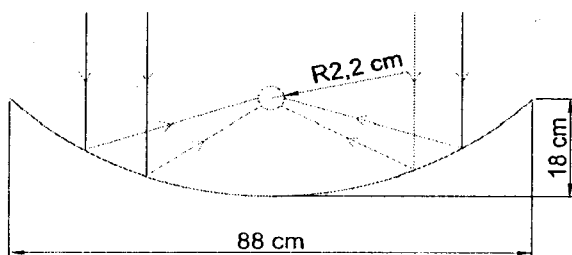


Fig. (3): Flow diagram of the active system processes

### 2.1.2. Parabolic trough solar collector

The Parabolic trough is solar concentrator, reflector and collector. It is manufactured from stainless steel sheet 1m x 2m, 1.5 mm thickness and 2 m long. The pipe of 22 mm diameter is located at the focal line of the trough to collect the most of the reflected solar radiation. Figure (4) shows the incident on the surface of the trough and the reflected solar radiation on the focal pipe, that is painted by black color to absorb the highest amount of the solar energy.



**Fig. (4) :** The incident on the surface of the trough and the reflected solar radiation on the focal pipe

For sun tracking a simple circuit is used to follow the sun during the daylight hours. The sensors is used to search for maximum intensity till it reaches it to get the highest light solar intensity.

Two DC motors are used to control the movement of the parabolic trough. They recieved the signals from the light intensity circuit, that send two signals, one to turn the motor in the direction where the trough moves upward and the other to move downward by using two rollers and wire. Trough pipe is attached with serpentine loops (heat exchanger) of 8 mm inside diameter and 15 meters long, which lies on the bottom of the still basin in order to transfer extra thermal energy to the solar still. It is made of copper and is painted with matt black paint. Pump is used to circulate the oil through the pipeline loop in closed and separate loop from water basin as an average rate of 1.0 L/min and about 50 Kpa operating gage pressure to compensate the elevation between the pump and the collector, as well as the pressure drop due to the main and minor losses (Elnono, 2012). To insure pump self-priming and aviod air bleeding, it was advisable to use a small insulated vessel (5.0 Litter-size) with the pipe line that connect the external outlet connection of the heat exchanger with the intake mouth of the pump. The pump outlet was connected to the inlet connection of the prabolic trough collector by using two adjustment control valves as in Fig. (1) to adjust the discharge of an average 1.0 L/min to flow to the collector and the rest of the pump discharge was by-passed to the insulated vessel. The required electrical

energy for pump operation could be calculated ( by assuming the overall efficiency equal 75% and operating time equal 12 h/day) as the following:

$$\begin{aligned} \text{the actual required power} &= \frac{P \times Q}{\eta_{\text{overall}}} = \frac{50 \times 1000 \times 1}{1000 \times 60 \times 75 \times 0.75} \\ &= 0.0015 \text{ hp} \quad = 0.0015 \times 0.7457 = 0.0011 \text{ kW} \end{aligned}$$

$$\text{the required electric energy} = 0.0011 \times 12 = 0.0132 \text{ kW/day}$$

LM35 Temperature Sensor is used for measuring temperature of the selected location inside the desalination system. The temperature sensor is connected with the digital temperature device, whose output voltage is linearly proportional to the Celsius temperature. It provides typical accuracies of  $\pm 1/4^\circ\text{C}$  at room temperature and  $\pm 1/4^\circ\text{C}$  over a full  $-55$  to  $+150^\circ\text{C}$  temperature range.

The data acquisition system is developed. It is composed of a card system and a software program. The card converts the electric signal of the temperature sensors, and then to an electronic signal compatible with the computer. The software program converts the electronic signal to the temperature reading and saves the reading of all 13-temperature sensors every 15 minutes.

### 2.1.3. Thermal Analysis of the Present Solar Desalination System

At any given time the still produces an amount of distillate water equal to  $W_p$  (L/m<sup>2</sup>) per unit area of the glass cover.  $T_w$ ,  $T_g$  and  $T_o$  ( $^\circ\text{C}$ ) are the average temperatures of basin water, the glass cover and ambient, respectively. The still receives solar radiation per unit area of  $I$  (W/m<sup>2</sup>). The operation of solar desalination system is governed by the following heat balance equations. Fig. (5) shows the various components of energy balance and thermal energy loss in the active solar still (Abdel-Rehim and Lasheen, 2007).

sky temperature, which is generally taken as 11°C, less than the ambient temperature.

H is the heat transfer coefficient from the glass cover to the surrounding and can be calculated as from (Duffie and Backman,1991):

$$h_{cg} = 5.7 + 3.8W_s, \text{ W/m}^2 \text{ K} \quad (5)$$

Where:

$W_s$ : wind speed (km/h)

### 2.1.3.2. Solar energy absorbed by basin water ( $q_w$ ):

The thermal energy equations of basin water are expressed as from (Rai,1980)

$$q_{iw} = (\tau\alpha)_w I - q_{lw}, \text{ W/m}^2 \quad (6)$$

Where:

$(\tau\alpha)_w$ : the thermal transmissivity absorptivity of water, dimensionless and equals 0.816.

$$q_{iw} = q_{ew} + q_{rw} + q_{cw} + q_H + q_{oil} + q_{lb}, \text{ W/m}^2 \quad (7)$$

Where:

$q_{iw}$ : is the input thermal energy to the basin water and can be obtained from the following equations:

(1)  $q_{ew}$ : evaporated heat transfer rate at the saline water surface and is a function of the hourly distilled production of the fresh water ( $W_h$ ) and is calculated from the following relationship:

$$q_{ew} = \frac{W_p \times 10^{-6} \times \rho_w \times L_w}{3600}, \text{ W/m}^2 \quad (8)$$

Where  $L_w$  is the latent heat of water evaporation at the cover temperature and equals  $2.35 \times 10^6$  J/kg.

(2)  $q_{rw}$  is the heat transfer rate by radiation between the saline water and the inner glass cover surface and is given as:

$$q_{rw} = \sigma F_{(w-g)} [\varepsilon_w T_w^4 - \varepsilon_g T_g^4], \text{ W/m}^2 \quad (9)$$



Where:

$\epsilon_w$  and  $\epsilon_g$  are water and glass absorptivity, dimensionless, and equal 0.96 and 0.89, respectively

$F_{(w-g)}$ : the radiation shape factor from saline water to the inner glass surface and equals here 0.9.

(3)  $q_{cw}$  is the convective heat transfer rate ( $W/m^2$ ) between the saline water and the inner glass cover surface, it was given by **Dunkle, (1961)** as:

$$q_{cw} = 0.883 \left[ (T_w - T_g) + \left( \frac{P_w - P_g}{0.265 - P_w} \right) \times (T_w + 273) \right]^{1/3} (T_w - T_g) \quad (10)$$

Where:  $P_w$  and  $P_g$ , ( $MN/m^2$ ), are the partial pressure of water at  $T_w$  and  $T_g$  ( $^{\circ}C$ ) respectively.

(4)  $q_{oil}$  is the rate of heat transfer from the oil to water which is energy absorbed by oil (serpentine) and transferred to the basin water due to the heat exchange between them.

$$q_{oil} = [m \times c_p \times (T_{in} - T_{out})]_{oil} \quad (11)$$

$$= [U \times A \times (T_{in} - T_{out})]_{oil} \quad (W/m^2) \quad (12)$$

Where:  $U$  is the overall heat transfer coefficient,  $W/m^2 \text{ } ^{\circ}C$ .

Then, the overall heat transfer coefficient can be calculated as:

$$U = \frac{q}{A \Delta T_{in}} \quad W/m^2 K \quad (13)$$

(5)  $q_{lb}$  is the heat losses from the basin base to the ground. It can be calculated as:

$$q_{lb} = h_{lb} (T_w - T_o), \quad W/m^2 \quad (14)$$

Where:  $h_{lb}$  is the convective heat transfer coefficient of the basin base and its function of thermal conductivity and the thickness of the insulation material which can be calculated as follows:

$$h_{lb} = \frac{K_m}{X_m}, \quad W/m^2 \quad (15)$$

Where:  $K_m$  and  $X_m$  are the thermal conductivity and thickness of the thermal insulation and equal  $0.04 W/m^{\circ}C$  and  $0.5 m$ , respectively.

### 2.1.4. Operational Efficiency of Solar Still

The expression for operational thermal efficiency of the solar still may be written as (Elnono,2012)

a) Passive solar still

1. The hourly thermal efficiency

$$\eta_{\text{passive,h}} = \frac{(m \times 10^{-3}) \rho_w L_w}{A_s I_s(t) \times 3600} \quad (19)$$

2. The daily thermal efficiency

$$\eta_{\text{passive,d}} = \frac{\sum (m \times 10^{-3}) \rho_w L_w}{A_s \sum I_s(t) \times 3600} \quad (20)$$

b) Active solar still obtained as the following:

1. The hourly thermal efficiency

$$\eta_{\text{active,h}} = \frac{(m \times 10^{-3}) \rho_w L_w}{A_s I_s(t) \times 3600 + A_a I \times 3600} \quad (21)$$

2. The daily thermal efficiency

$$\eta_{\text{active,d}} = \frac{\sum (m \times 10^{-3}) \rho_w L_w}{A_s \times \sum I_s(t) \times 3600 + A_a \times \sum I \times 3600} \quad (22)$$

Where:

m: the hourly productivity, (ml/h).

$A_s$ : the area of the solar still, ( $m^2$ ).

$A_c$ : the area of the solar collector, ( $m^2$ ).

$I_s(t)$ : the solar flux on the inclined glass cover of the solar still, ( $W/m^2$ ).

$\rho_w$ : the density of water ( assumed to be  $1000 \text{ kg/m}^3$ ).

$A_a$ : collector aperture area, ( $m^2$ ).

$L_w$ : the latent heat of water evaporation at the saturation temperature  $T_w$  (assumed to be  $2.35 \times 10^3 \text{ KJ/kg}$ ).

### 3- RESULTS AND DISCUSSION

Various experiments were carried out and the average measurements of temperature, relative humidity, wind speed, solar intensity and distilled water production were taken on hourly basis for several days of three months (September, October and November, 2012) for the active and the passive solar still during the daylight hours (from 7:00 AM. to 6:00 PM). All temperature variation, fresh water productivity and accumulated fresh water per day for the active and the passive solar desalination systems

under case study are presented and illustrated in Figs.(6–11) for different months.

### 3.1. Hourly Variations of Temperature

#### 3.1.1. Hourly variations of ambient and inner glass temperature

The hourly variation of the ambient,  $T_a$ , and inner glass cover temperatures,  $T_{gi}$  and  $T_{go}$  for active and passive still is illustrated in Fig. (6). The temperature of the inner glass cover is higher than the outlet glass temperature and have peak values around the noon interval (12:00 – 4:30) for active and passive still. The maximum temperature for the active solar still for the inner and outer glass temperature were This is due to the release of more heat of condensation on the inner surface of glass cover, although the temperature values of the active solar still are higher than the passive solar still.

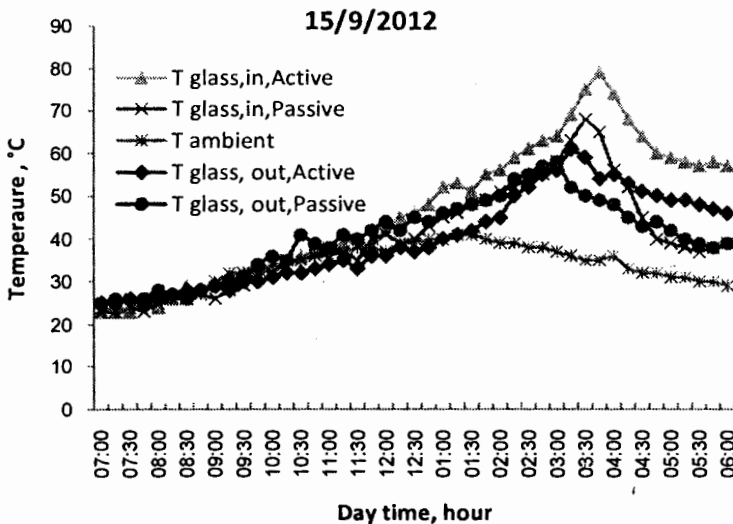


Fig. (6). Variations of ambient temperature and inner glass temperature for the passive and the active solar stills (15/9/2012)

#### 3.1.2. Hourly variations of ambient and basin water temperature

Figure (7) shows the hourly variation of basin water temperatures,  $T_w$ , and ambient temperature,  $T_a$ . It is obvious that all temperatures increase and begin decrease after 4:00 PM, with respect to the variation of the solar radiation and due to transfer extra thermal energy to the basin water

of the active solar still from the parabolic trough collector through the heat exchanger, although the temperature values of the active solar still are higher than the passive solar still. The average basin water temperature of the active solar still reached the highest value about 90 C° during the period from 3:00 until 4:00 p.m. on Sep. 15, 2012, while it was 64 90 C° for the passive solar sill.

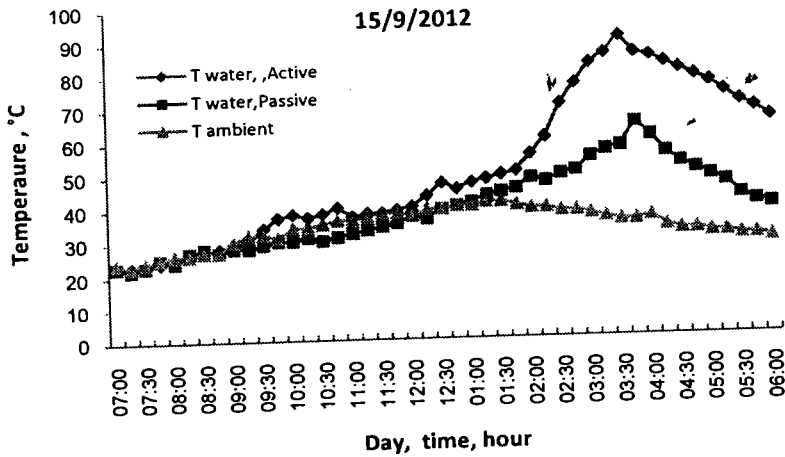


Fig. (7). Variations of ambient temperature and basin water temperature for the passive and the active solar stills (15/9/2012)

### 3.1.3. Hourly temperature variations of oil cycle

Figure (8) shows the temperature variation of the oil cycle for the selected days. It is noticed that the temperature of the inlet oil to the heat exchanger has a higher value than the outlet oil temperature from the heat exchanger.

### 3.2. Water Productivity

The typical experimental results of the hourly and accumulated water productivity are shown in Figs. (9-11), respectively, the average measured wind speed was 0.5m/s. It is clear that the modified system is an efficient than conventional solar still.

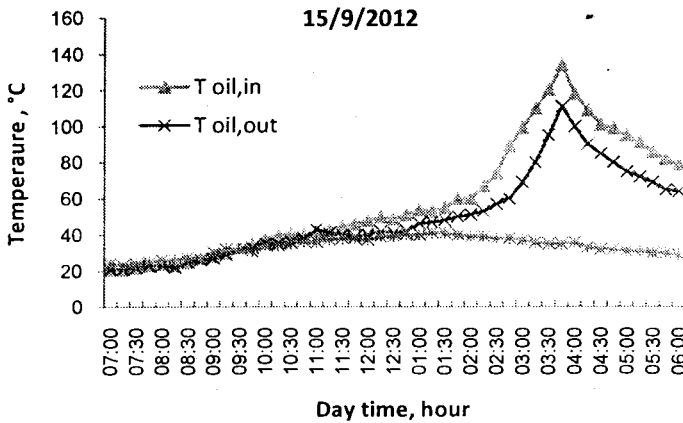


Fig. (8): Variations of the oil in temperature, the oil out temperature and the ambient temperature (15/9/2012)

### 3.2.1. Hourly water productivity

As shown in Fig (9) there was a considerable increase in the productivity of the active solar still over that of the passive still. It is obvious that the water productivity has a maximum value from (3:00 p.m. to 4:00 p.m.) and then the water productivity decrease. The maximum hourly water productivity on Sep. 15, 2012 was 900 ml/m<sup>2</sup> for the active solar still, while it was 640 ml/m<sup>2</sup> for the passive solar still at 4:00 p.m.

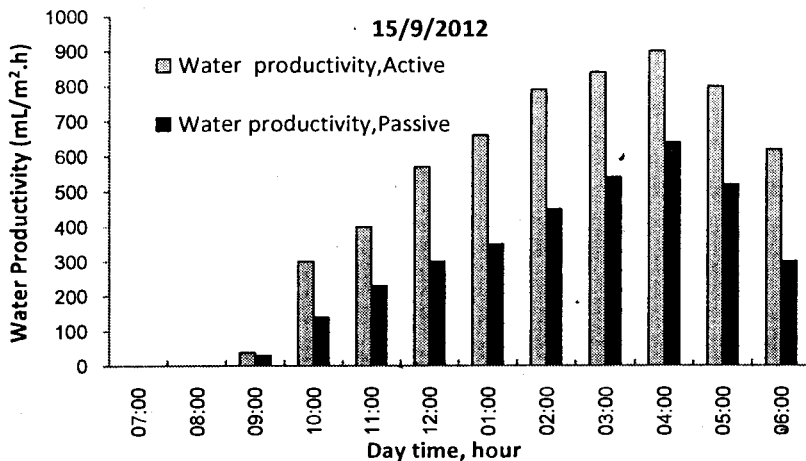


Fig. (9): Fresh water productivity for the passive and the active solar still (15/9/2012)

### 3.2.2. Accumulative water productivity

As shown in Fig (10) the accumulative water productivity for active solar still is higher than the passive solar still, this due to supplying additional heat energy to the basin water from parabolic trough collector to increase its temperature and, of course, increase the temperature difference between the basin water and inner glass temperature which is the main parameter that affects the still productivity. The total water productivity on Sep. 15, 2012 was 5918 ml/m<sup>2</sup> for the active solar still, while it was 3500 ml/m<sup>2</sup> for the passive solar still.

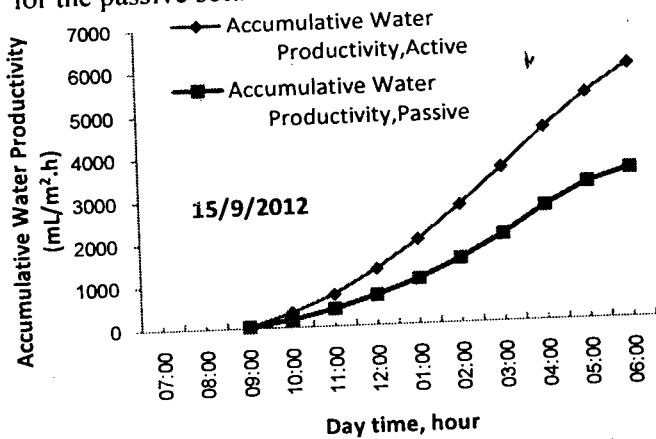


Fig. (10): Accumulative fresh water productivity for the passive and the active solar stills (15/9/2012)

Figure (11) shows the average accumulated water productivity for three months (September, October and November, 2012).

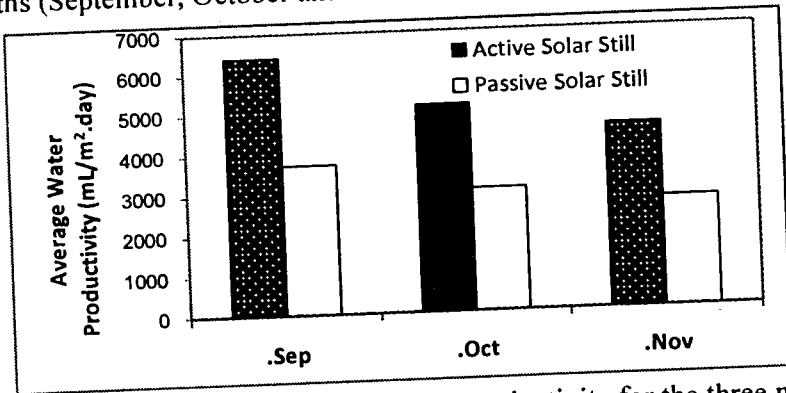


Fig (11): The average accumulated water productivity for the three months

The average daily production rates of September, for the active and passive solar still were 6.403 L/m<sup>2</sup>.day and 3.722 L/m<sup>2</sup>.day, while in October, they were 5.151 L/m<sup>2</sup>.day and 3.052 L/m<sup>2</sup>.day and in November they were 4.571 L/m<sup>2</sup>.day and 2.728 L/m<sup>2</sup>.day.

#### 4- Economic Analysis

The payback period of the experimental setup depends on the overall manufacture cost, maintenance cost, cost of feed water, operating cost and the required electric power for turning the pump (Elnoho,2012 and Velmurugan et. al, 2008). So, the economic analysis, according to the current Egyptian conditions, is estimated as the following:

Overall manufacture cost (investment) = EGP 2032

Maintenance cost = EGP 0.6 / day

Operating cost = EGP 0.6 / day

Cost of feed water is negligible. The subsidized price of electricity that given by the government sector is taken as EGP 0.16 kWh, then Cost of the required electric power for turning the pump = (0.0132 kWh/day)(0.16 EGP 0.16 kWh) = EGP 0.0021/day

The average productivity of the active solar still of the three months (Sep., Oct. and Nov.) = 5.373 L/day

The price of distilled water = EGP 2.0 / L

The average price of the distilled water production of the active solar still = (5.373)(2) = EGP 10.746/day

Net profit = the price of the produced distilled water – (maintenance cost + operating cost + cost of feed water + cost of the required power for turning the pump)

Net profit = 10.746 – ( 0.6 + 0.6 + 0.0 + 0.0021) = EGP 9.54 /day

Pay back period = investment / net profit = 2032/9.54 = 213 days

The payback period should be decreased less than 213 days due to the expected increase in the active still productivity during the summer season.

#### 5- CONCLUSSION

From the obtained results, it can be concluded with use of modified solar still (active) which gave higher water productivity and lower payback period (213 days) comparing with passive solar still and it should be increase during the summer season. It was also found that the thermal efficiency of the active solar still (23%) is lower than the passive solar still (38%).

**REFERENCES**

- Abdel-Rehim, Z. S. and A. Lasheen (2007). Experimental and theoretical study of a solar desalination system located in Cairo, Egypt. Desalination; 217: 52-64.
- Badran, A. A., A. A. Al-Hallage, I. A. E. Salman and M. Z.Odat (2005). A Solar Still augmented a flat plat collector. Desalination, 192: 227-234 .
- Dunkle, R.V. (1961). The Roof-type still and a Multiple Effect Diffusion still. Solar water distillation. International Heat Transfer Conference. University of Colorado, USA, Part 5: 895-902 .
- Elnono, M. (2012). Experimental investigation of a solar still-collector system for solar desalination in rural and desert communities. Misr J. Ag. Eng., 29 (3): 1101-1124.
- Rai, G.D. (1980). Solar Energy Utilization, Textbook for Engineering Students. Khanna, Nai Sarak, New Delhi, India.
- Sayigh, A.A.M. (1977). Solar energy engineering. 1st Ed., academic press.
- Velmurugan, V., S. Kumaran, V. N. Prabhu, and K. Srithar (2008). Productivity engancement of stepped solar still-performance analysis. Thermal Science. 12(3): 153-163.
- <http://www.fao.org>

**المخلص العربي**

نظام لتحلية المياه يعمل بالطاقة الشمسية  
باستخدام مجمع شمسي على شكل قطع مكافئ

زينب هندي\*، مبارك محمد مصطفى\*، محمود احمد النونو\*، اشرف لاشين\*\*،

زينب سيد عبد الرحيم\*\*\*

تعتبر الطاقة الشمسية إحدى الطرق المستخدمة في تحلية المياه منذ سنوات عديدة كمصدر نظيف صديق للبيئة ومتجدد للطاقة. وتتمثل أهمية هذه التقنية في سد الاحتياجات المتزايدة لمياه الشرب أو الأغراض الزراعية مع تزايد تعداد السكان كما أنها تعتبر اقتصادية الى حد ما وكذلك توفر الكثير من مصادر المياه المالحة لذا اهتم العديد من الباحثين بتحلية مياه البحار والمحيطات باستخدام الطاقة الشمسية بواسطة طرق مختلفة ومتعددة.

\* قسم الهندسة الزراعية، كلية الزراعة، جامعة عين شمس.  
\*\* قسم الهندسة الميكانيكية، كلية الهندسة بشبرا، جامعة بنها.  
\*\*\* قسم الهندسة الميكانيكية، المركز القومي للبحوث، الدقي.



يقدم البحث وحدة لتقطير الهيازة تم انشائها واختبارها، وهي عبارة عن مقطر شمسي من النوع (L - Shape) تم تطويره باضافة مجمع شمسي على شكل قطع مكافئ مثبت به أنبوبة على محوره البؤري ، كما تشتمل على مبادل حراري بسيط عبارة عن (serpentine) مثبتة في قاع المقطر. يتم ضخ زيت كمائع شغال في دورة مغلقة عبارة عن الأنبوبة على المحور البؤري للقطع المكافئ ثم ال (serpentine) وذلك بتوصيلهما باستخدام أنابيب معزولة حراريا. تم اختيار الزيت كمائع شغال لما له من خصائص حرارية وفيزيائية عالية تتيح له الاحتفاظ بالحرارة لاطول فترة ممكنة بهدف نقل مزيد من الطاقة الحرارية للمياه الموجودة في حوض المقطر. فنجد أنه يتم تسخين المياه داخل حوض المقطر مباشرة عن طريق الاشعاع الشمسي الساقط عليه مباشرة وايضا عن طريق التبادل الحراري بين الزيت الموجود في ال (serpentine) والمياه الموجودة في قاع المقطر.

تم عمل دائرة كهربائية للمجمع الشمسي المقترح حتى يقوم بعمل تتبع للشمس وذلك حتى يتمكن من تجميع أكبر كمية ممكنة من الاشعاع الشمسي. تم دهان ال (serpentine) المثبتة في قاع الحوض باللون الاسود وذلك لتقوم بامتصاص أكبر كمية ممكنة من الطاقة الشمسية. تم تقديم التحليل الحراري للنظام المقترح في هذه الدراسة. تم حساب الكفاءة الكلية للنظام المقترح. تم اجراء عدة تجارب في أشهر سبتمبر - أكتوبر - نوفمبر لعام ٢٠١٢. قيست درجات الحرارة باستخدام مستشعر للحرارة من النوع (LM35) بدقة ( $\pm 1/4$  °C) وجهاز رقمي لرصد وتسجيل درجات الحرارة كل ١٥ دقيقة. تم الحصول على قيم الاشعاع الشمسي من الهيئة العامة للأرصاد الجوية.

وقد أظهرت النتائج ما يلي:

- ١- متوسط انتاجية النظام التقليدي هو ٣.١٧ لتر/يوم/م<sup>٢</sup> و انتاجية النظام المعدل ٥.٣٧ لتر/يوم/م<sup>٢</sup>.
- ٢- كفاءة النظام المعدل تزيد عن النظام التقليدي بحوالي ٤١.٠٧%.
- ٣- من التحليل الاقتصادي للنظام المعدل تبين أن فترة الاسترداد لرأس المال حوالي ٢١٣ يوم ، وهذه الفترة يجب أن تقل عن ذلك بسبب زيادة الانتاجية خلال فصل الصيف كما هو متوقع.