

WATER MANAGEMENT FOR SESAME CROP IN SANDY SOIL

Sharaf, G. A.¹ Khalil A.² Azza H.² Hashem M.³

ABSTRACT

The main objective of this study was to investigate the proper water regime of sesame crop under different irrigation methods in sandy soil in Egypt, Bostan West Delta. Two successive growing seasons of sesame production were conducted during 2013 and 2014 by the use of split plot design. The irrigation regime treatments were to apply 80%, 100% and 120% of the crop evapotranspiration. The three methods of irrigation were drip surface, drip subsurface and sprinkler methods. The irrigation intervals were 2 days and 4 days for the drip and sprinkler systems respectively. A seasonal water consumptive use by sesame were 490, 465 and 525 mm/season for drip surface, drip subsurface and sprinkler irrigation system respectively. Average irrigation applied water was 2641m³ /fed , 2496 m³ /fed and 4193 m³ /fed by the drip surface, drip subsurface and sprinkler systems respectively. The corresponding average seed yields were 557, 555 and 585 kg/fed.. Significant difference was found in seed production due to the irrigation system and the irrigation regime. The average oil yields were 237, 244 and 249.8 kg/fed. for the same previous order. The WUE of seeds and oil affected significantly by both the irrigation systems and irrigation regime. A high correlation was found between the biological yield and plant height, No. of capsules/plant and weight of dry seeds/plant as 0.86, 0.71 and 0.94 respectively. The yield functions of seeds and oil were non linear. A set of yield functions for seeds and oil under the different irrigation system were performed. The results indicated that when applying maximum irrigation water 2620 m³/fed., the subsurface drip irrigation system produced 702.6 kg seeds/fed. and 311.4 kg oil/fed., meanwhile the surface drip irrigation system produced 686.5 kg seeds/fed. and 304.8 kg oil/fed. when 2798.2 m³ water was added per fed.

¹ Prof. of Agric. Eng., Soil Dept. Fac. of Agric, Saba- Basha, Alex. Univ.

² Senior Res., Agric. Eng. Res. Institute

³ Res., Agric. Eng. Res. Institute

The sprinkle irrigation system produced 616.7 kg seeds/fed. and 268.1 kg oil/fed. when 4010.3 m³ water was added per fed. Among all the study treatments, the application of subsurface drip irrigation system at 100% of ET_c indicated the best results related with the yield of seeds and oil and the other yield components, Although, there is no significant difference between the irrigation water used between the subsurface drip and surface drip irrigation.

INTRODUCTION

Oil crops are the source of edible and industrial oil with a wide variety of usage as well as of protein meals. Sesame (*Sesamum indicum*L.) is one of the most important oil crop in the world because seeds have high content of oil and protein. In Egypt most of the seed production is consumed as edible products such as Tehena, Halawa Tahiniya and bakery products. The total production of edible oil is about 10% of the consumption in Egypt. Therefore, many attempts are being made to raise total production of oil crops particularly sesame for narrowing *Manal et al. (2007)* recommended to apply five irrigations to sesame with total amounts of water between 4367 and 4728 m³/ha, which could save up to 1027 m³/ha, with yield losses less than 2%. *Erkan et al. (2007)* evaluated the effect of the irrigation methods and intervals on yield and yield components of sesame. They found that when 971 mm of water was applied, evapotranspiration (ET_c) of sesame was 995mm for sprinkler, 1102mm for drip in 1st season. For 2nd season total water applied was 1037 mm and evapotranspiration of sesame was 1111mm (sprinkler), 1135mm (drip). Plant height and number of capsules per plant were significantly affected by drip irrigation. Average sesame yield was 1737 kg ha⁻¹ for drip irrigation while sprinkler irrigation gave 1283 kg ha⁻¹. *El-Wakil and Gaaffar (1988)* indicated that applying six irrigations to sesame crop without skipping any one gave the highest values of yield and its attributes, whereas the lowest values were resulted from applying five irrigations and skipping one at the beginning of flowering. Applying three, four, five and six irrigations gave seasonal ET_c of 1323, 1382, 1487 and 1647 m³/fed, respectively. Moreover, applying six irrigations gave the highest WUE value as 0.35 kg seeds/m³ of water consumed. *Kassab et al. (2005)* found that irrigation regime of 100% (1839 m³/fed.) in

controlled surface irrigation and 999 m³/fed. in both sub-surface and surface drip irrigation caused significant increases in the growth parameters, yield and its related traits as well as seed oil content, yield and WUE. The obtained results suggested that controlled surface irrigation system and irrigation regime of 100% of ET_c could be recommended for improving productivity of sesame plants under similar conditions.

The main objectives of this work are:

1. Study the effect of three different irrigation methods (drip surface, drip subsurface and sprinkler) at three levels of irrigation regimes (100% (control), 80 and 120% from normal irrigation requirements) on the production of Sesame crop.
2. Determine the yield function and the water relation to Sesame yield components.
3. Evaluate the irrigation system used.

MATERIAL AND METHODS

Field Experimental Site:

Two field experiments were carried out during two successive seasons of 2013 and 2014 at Ahmed Ramy Village – Al-Bostan. The physical and chemical properties of the experimental site are presented in Tables (1) and (2). The parameters were determined according to *Black et al. (1985)*.

Table (1): Physical properties of the soil

Soil depth (cm)	Particle size distribution (%)			Soil texture class	b.d g cm ⁻³	ϕ m ³ m ⁻³	F.C m ³ m ⁻³	P.W.P m ³ m ⁻³	Aval. Water m ³ m ⁻³	k, mm h ⁻¹
	Sand	Silt	Clay							
0 – 30	87	4	9	Loamy Sand	1.45	0.47	0.13	0.054	0.076	128
30 – 60	88	4	8	Loamy Sand	1.48	0.46	0.12	0.062	0.058	132
Aver.	87.5	4	8.5	Loamy Sand	1.465	0.465	0.125	0.058	0.067	130

The field was plowed, and leveled to provide a smooth seedbed. Cultivating management included application of Calcium super phosphate and potassium sulphate at the rates of 200 and 50 kg/fed. respectively, were added before planting and weeds control. Sesame seeds (*Sesamum*

indicum L.) cv. Shandweel 3 was sown in hills, with a distance of 0.10 m between hills and 0.60 m between rows. The normal agricultural practices for growing sesame were followed as recommended in the region. Nitrogen fertilizer added as ammonium nitrate 33.5 % at the rate of 100 kg/fed. applied in three doses the 1st after thinning then 2nd and 3rd through one month.

Table (2): chemical properties of the soil

Soil depth (cm)	EC _e dS/m	pH	Total CaCO ₃ %	O.M	Soluble cations (meq/l)				Soluble anions (meq/l)		
					Ca ²⁺	Mg ²⁺	Na ⁺	K ⁺	HCO ₃ ⁻	SO ₄ ²⁻	Cl ⁻
0-30	5.32	7.9	10.5	0.7	16.75	14.3	27.4	0.55	3.5	31.8	23.7
30-60	5.15	8.0	10.7	0.8	17.75	14.6	27.3	0.55	3.7	32.5	24
Aver.	5.235	7.9	10.6	0.75	17.25	14.45	27.35	0.55	3.6	32.15	23.85

Irrigation Systems:

1- Surface and subsurface drip irrigation systems were used GR (4 l/h) lateral per row. The different components and parameters of the drip irrigation systems are summarized in Table (3).

Table (3): Specifications of surface and subsurface drip irrigation networks.

Drip lateral	GR	emitter spacing (m)	0.3
PVC main line diameter (mm)	75	Operating pressure (kPa)	150
PVC submain diameter (mm)	63	Pump discharge (m ³ /h)	45
PVC lateral diameter (mm)	50	Pump pressure head (kPa)	380
manifold diameter(mm)	18	Power of elect. motor (kW)	15
Surface emitter flow rate (l/h)	3.49	Sub surface emitter flow rate (l/h)	3.76

Drip Irrigation System Evaluation:

The emission uniformity EU, and the absolute uniformity, EU_a, as proposed by Walker, (1980), were applied for field evaluation of the drip surface and subsurface systems as:

Where:

$$EU = \frac{q_{ave_{1/4}}}{q_{ave}} * 100 \quad (1)$$

$$EU_a = \frac{1}{2} * \left[\frac{q_{ave_{1/4}}}{q_{ave}} + \frac{q_{ave}}{q_{ave_{1/8}}} \right] * 100 \quad (2)$$

- $q_{ave1/4}$ the average of the lower 1/4 of the emitter discharge rates.
 q_{ave} the average of all emitter discharge rates.
 $q_{ave1/8}$ the average of largest 1/8 of the emitter discharge rates.

2- Fixed sprinkler irrigation systems were used. The components and parameters of the irrigation system network at the experimental site are summarized in Table (4). The discharge from the sprinkler jet was calibrated as recommended by the *ASAE Standards (2001)*. The pressure was measured at the field using a hypodermic needle assembly and dial pressure gage. The sprinkler irrigation system uniformity was carried out using catch can test.

Table (4): Specifications of sprinkler irrigation network.

Sprinkler size	RC235 ($\phi 4.36 \times 2.25$ mm)	PVC. lateral diameter mm	63
Raiser height	120 cm	Sprinkler spacing (m)	12 \times 12
Steel riser diameter (mm)	26.7	PVC main line diam. (mm)	110
Working pressure (kPa)	210	Pump pressure head (kPa)	380
sprinkler flow rate (m ³ /h)	1.05	Motor elect. power (kW)	15

Sprinkler Irrigation System Evaluation:

The Distribution Uniformity (DU) by *Marriam and Keller (1978)* was applied to calculate the uniformity of application, as:

$$DU = \frac{q_{ave1/4}}{q_{ave}} * 100 \quad (3)$$

Where:

$q_{ave1/4}$ average of low quarter of water received

q_{ave} average depth of water received

The Coefficient of Uniformity CU developed by *Christiansen (1942)* as:

$$CU = 100 \left[1 - \frac{\sum |z - m|}{n \cdot m} \right] \quad (4)$$

where

- z individual depth of each observation from the uniformity test (mm)
m mean depth of water (mm)
n number of catch cans

Water application efficiency (E_a) as defined by *Li and Rao (2004)* as:

$$E_a = \frac{d_t}{d_a} \times 100 \quad (5)$$

Where:

- d_t average depth of irrigation water received by the catch cans (mm)
 d_a average depth of irrigation water applied (sprinkler application rate for a given time mm)

Both of the drip (surface and subsurface) and sprinkler irrigation systems were evaluated before planting, forty days after planting and after harvesting. Repair, maintenance, was conducted before each growing season.

Sesame Crop Coefficient:

The sesame crop coefficients at different growing stages, stage length cited from FAO Report No. 56 by *Allen et al., 1998* is given in Table. (5).

Table (5): Sesame basic data cited from FAO report No.(56).

Stage	Initial	Development	Mid- season	Late - season
Coefficient	0.35	-	1.1	0.25
Length (days)	20	40	30	20

Adjustment of Sesame crop Coefficients :

The initial stage coefficient ($K_{c_{ini}}$) in the FAO tables are only approximations and should only be used for estimating ET_{crop} during preliminary or planning studies. More accurate estimates of $K_{c_{ini}}$ can be obtained by considering, the interval between wetting, events, evaporation power of atmosphere and the magnitude of the wetting events. During the initial period the leaf area is small and evapotranspiration is predominately in the form of soil evaporation. The graphical method (*Allen et al., 1998*) was used to adjust $K_{c_{ini}}$. For the drip and sprinkler irrigation systems the frequencies were two and four days; E_{To} was 6.7 mm during the $K_{c_{ini}}$ and the irrigation depths were < 10mm for drip and > 40 mm b for sprinkler. From Fig. (29) and Fig. (30) (*Allen et al., 1998*)

Kc_{ini} is about 0.65 and 0.5, for drip and sprinkler irrigation respectively. Further adjustment to the Kc_{ini} was done by considering the partial wetting in the drip system as:

$$Kc_{ini} = fw \cdot Kc_{ini} \quad (6)$$

fw is the fraction of surface wetted by irrigation ranged between 0-1. By observation fw was about 0.7 for surface drip system meanwhile 0.5 for the sub surface drip system. Therefore, the Kc_{ini} of the Sesame for the surface drip system became 0.46 and for the subsurface as 0.33.

The values of Kc_{mid} and Kc_{end} given by FAO report No.56 for a sub humid where RH_{min} differ from 45% or where U_2 is larger or smaller than 2 m/s, Kc_{mid} and Kc_{end} values are adjusted as:

$$Kc_{end} = Kc_{end-Tab} + [0.04(U_2 - 2) - 0.004(RH_{min} - 45)] \left[\frac{h}{3} \right]^{0.3} \quad (7)$$

$$Kc_{mid} = Kc_{mid-Tab} + [0.04(U_2 - 2) - 0.004(RH_{min} - 45)] \left[\frac{h}{3} \right]^{0.3} \quad (8)$$

Where:

Kc_{mid} adjusted sesame mid- season coefficient.

$Kc_{mid-Tab}$ tabulated value of mi-season sesame coefficient (Allen, et al., 1998).

Kc_{end} adjusted sesame late-season coefficient.

$Kc_{mid-Tab}$ tabulated value of mi-season sesame coefficient.

U_2 mean value of daily wind speed at 2m height (m/s).

RH_{min} mean value of minimum relative humidity (%).

H Plant height (m).

The minimum relative humidity and wind speed during the growing season on the experimental site are presented in Table (6). According to these values the midseason sesame coefficient adjusted to 1.2 instead of 1.1 and the late season adjusted to 0.35 instead of 0.25. The final crop coefficient of sesame at different grown stages and irrigation systems presented in Table (7).

Table (6): Weather data for adjusting crop coefficient at mid and late season.

	RH_{min} %	U_2 m/s
Mid- season	36.65	4.69
Late - season	40.25	5.01

Table (7): Final adjusted Sesame crop coefficients

System type	Stage			
	Initial	Development	Mid- season	Late season
Drip surface	0.46	-	1.2	0.35
Drip subsurface	0.33	-	1.2	0.35
Sprinkler	0.50	-	1.2	0.35

The sesame daily Kc during the initial and mid-season stages are constants and during the development and late-season stages vary linearly between the end of the previous stage and the beginning of the next stage and

$$Kc(i) = Kc_{prev} + \left[\frac{i - \sum L_{prv}}{L_{stage}} \right] (Kc_{next} - Kc_{prev}) \quad (9)$$

calculated as:

Where:

$Kc(i)$ crop coefficient of the day No. i

Kc_{prev} Kcb value of the previous stage

L_{stage} length of the stage under consideration (days)

$\Sigma(L_{prev})$ sum of the lengths of the previous stages (days)

Kc_{next} Kcb value of the next stage

Reference Evapotranspiration(ETo):

ETo by Penman-Monteith was calculated using the climatic weather data that recorded by local meteorological weather station as described by Allen et. al., (1998).

Sesame Water Requirements (ETcrop):

The daily sesame water requirements were estimated by the following:

$$ET_{crop} = ETo \times Kc \quad (10)$$

Where:

ET_{crop} Sesame ETc under sprinkler irrigation system (mm/day)

Kc Sesame crop coefficient. It may be for sprinkler, drip surface or sub surface.

In case of drip irrigation system the previous equation was applied in addition to multiply by another factor called reduction coefficient (Kr). It was estimated according to Allen et al., (1998) by the following formula as:

$$Kr = \frac{Kc_{min}}{Kc_{full}} + \left[1 - \frac{Kc_{min}}{Kc_{full}} \right] \times GC^{\left(\frac{1}{1+h} \right)} \quad (11)$$

Where:

Kc_{min} minimum Kc for bar soil, in the presence of vegetation (0.15 – 0.2)

Kc_{full} Kc during the mid- season at big plant size or height

Gc ground cover. By observations it was about 70% at mid season

H plant maximum height (m), for Sesame about 1 m

Gross Irrigation Water Requirements (GIWR):

The general equations applied to calculate the GWR are as follows:

$$GIWR = \frac{ET_{crop}}{Ea \times ks} \times \frac{1}{LR} \quad (12)$$

Where:

Ea irrigation system application efficiency

LR leaching requirements

Ks Coefficient of water storage of the soil, used in drip surface or subsurface only considered 0.9 for the sandy soil as proposed by Vermeiren and Jobling (1980).

Leaching Requirements (LR):

Leaching requirements to control the soil salinity, estimated according to Doorenbos and Pruitt, (1977), who proposed the following formula for drip and high frequency sprinkler interval system. The following formula assumed to be valid for both irrigation systems applied:

$$LR = \frac{EC_w}{2 \max EC_e} \quad (13)$$

where:

$\max EC_e$ maximum EC of the soil saturation extract of Sesame (dS/m)

EC_w electrical conductivity of the irrigation water (dS/m).

The average salinity of irrigation water (EC_w) was 1.75 dS/m, and the $\max EC_e$ was 5.5 dS/m, therefore, the leaching requirements is 0.16 for all the irrigation systems.

Irrigation Duration (Ti):

The irrigation duration or the irrigation time for the drip surface or the subsurface was estimated by the following:

$$Ti_{drip} = \frac{GIWR \times Ir \times Sp \times Sr}{q \times ne} \quad (14)$$

Where:

- Ti_{drip} irrigation time to operate the surface or the subsurface irrigation system (h)
 Ir irrigation interval 2 days, by surface or the subsurface irrigation systems (days)
 Sp distance between plants (m)
 Sr distance between rows (m)
 q emitter flow rate (l/h)
 ne number of emitters per plant.

The irrigation time for the sprinkler irrigation system (Ti_{spr}):

$$Ti_{spr} = \frac{GIWR}{A_r} \quad (15)$$

Where:

A_r sprinkler application rate by (mm/h). The application rate by the sprinkler was estimated by:

$$A_r = \frac{Q_s \times 1000}{S \times R} \quad (16)$$

Where:

- Q_s sprinkler discharge (m³/h)
 S distance between sprinklers on lateral (m)
 R distance between laterals (m)

Sesame Crop Water Consumptive Use (WCU):

Gravimetric soil samples, from soil surface down to 0.6 m depth at 0.2 m intervals were collected along the growing season of sesame from drip and sprinkler treatments before and after each irrigation to determine WCU (mm/day) which is considered (ETa). WCU was estimated according to *Simonne and Dukes (2010)* as:

$$WCU = \frac{\sum D(\theta_{vt} - \theta_{vf})}{100 \times ND} \quad (17)$$

Where:

- D thickness of the soil layer (mm)
- θ_{vi} initial volumetric soil moisture content (%)
- θ_{vf} volumetric soil moisture content after irrigation (%)
- ND No. of days between initial and after irrigation

Experimental Crop Coefficient of Sesame (K_c)

Sesame experimental crop coefficient (k_{cs}) values for the initial, mid and late season stages were calculated using the following equation as described by *Allen et al. (1998)*:

$$Kc = \frac{WCU}{ET_o} \tag{18}$$

Experimental Design:

Split plot design (Fig. 1) with the main plot represents irrigation systems and the subplot for irrigation regimes. The irrigation systems were surface drip irrigation (I_1), subsurface drip irrigation (I_2) and sprinkler irrigation (I_3). The sub-plots included three application rates as deficit irrigation ($D = 80\%$ of ET_c), normal irrigation ($N = 100\%$ of ET_c) and excessive irrigation ($E = 120\%$ of ET_c) that commonly supplied in the region. Only the two central rows were used for sampling for each treatment.

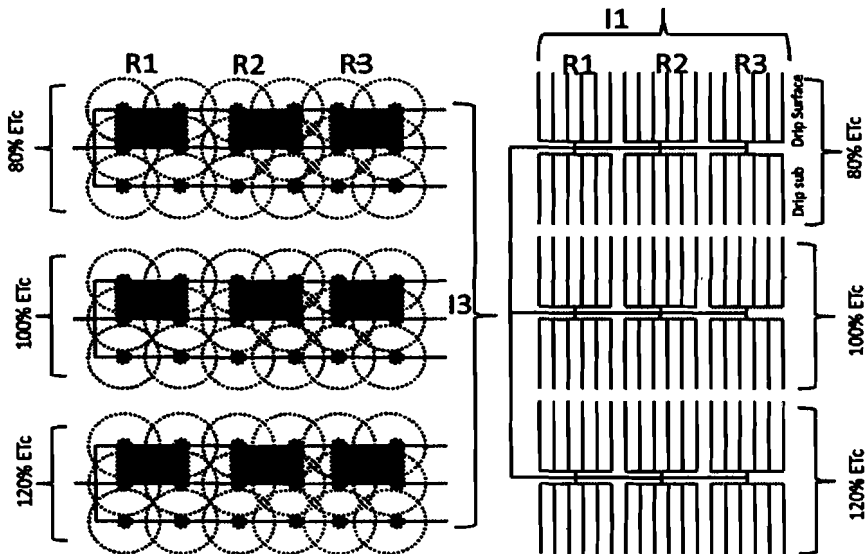


Fig. (1): Field experimental design layout

Water Use Efficiency (WUE):

WUE a key term in the evaluation of water productivity in dimensions of (kg m^{-3}) or ($\text{Kg ha}^{-1}\text{mm}^{-1}$), proposed by *Molden (2003)*.

Yield and Yield Components:

At harvest, samples of plants (area 1.2 m^2) of a two central ridges were uprooted from each treatment randomly and topped to determine biological yield, plant length, number of capsules, weight of 1000 seeds, yield of seeds and oil and total seeds yield per feddan.

Data Analysis:

The data were analyzed using Costat 6.311 win statistical program CoHort Software (2005). Average values from the three replicates of each treatment were interpreted using the analysis of variance (ANOVA). The Duncan's Multiple Range Test (SNK) was used for comparisons among different sources of variance.

RESULTS AND DISCUSION**Field Evaluation of Drip Irrigation System:**

The surface and subsurface drip irrigation systems evaluation parameters are given in Table (8).

General criteria for EU' and EU'a values are; 90% or greater, excellent; 80 to 90% , good ; 70 to 80%, fair; and less than 70% , poor (*Solomon, 1977*). Results in Table (8), showed high values of both EU' and EU'a which proves that the systems were managed and designed well (no clogging due to efficient filtration, no leakage, low flow variation and low hydraulic variation). The relationship between EU' and EUa' showed linear function as given in Fig. (2).

Table(8): Parameters of field evaluation of the drip surface and subsurface irrigation systems

Date	First Season				Second Season			
	Subsurface		Surface		Subsurface		Surface	
	EU'	EU'a	EU'	EU'a	EU'	EU'a	EU'	EU'a
Before planting	94.14	94.96	94.92	95.35	94.92	95.35	95.11	96.42
40 days after planting	91.81	91.17	93.47	94.20	93.48	91.81	91.44	90.87
After harvesting	90.68	90.66	91.47	90.07	86.18	90.75	87.69	88.73

Field Evaluation of Sprinkler Irrigation System:

Distribution Uniformity DU, Coefficient Uniformity CU and Water Application Efficiency were calculated before planting, forty days after planting and after harvesting, Results in Table (9).

Table (9): Results of sprinkle irrigation system field evaluation

Date	First Season			Second Season		
	Ea (%)	CU(%)	DU(%)	Ea (%)	CU(%)	DU(%)
Before planting	61.64	89.79	82.43	62.65	90.99	85.8
40 days after planting	62.63	88.6	83.92	60.12	88.49	82.93
After harvesting	74.27	91.12	85.59	73.77	88.46	81.34

DU>75%, CU>84 % is recommended (Benami and Ofen 1984). Ea values over 80 is desirable, less than 60 not acceptable, between 60 and 80 is fair (ASCE 1978). According to these criteria the sprinkler irrigation system performance is acceptable. The relationship between CU and DU showed linear function as given in Fig. (3).

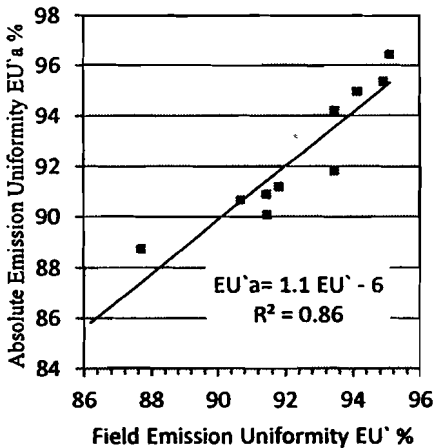


Fig.(2): The relationship between EU' and EU'a

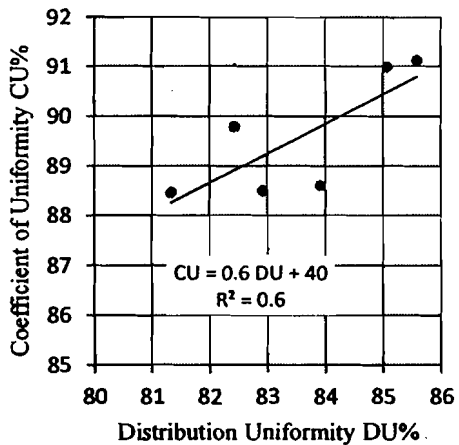


Fig.(3): The relationship between DU and CU

Sesame crop coefficient Kc:

The Sesame crop coefficient cited from Allen, et al., (1998) was adjusted as given in Fig.(4). The actual water consumptive use (WCU) by plant and value of Kc was determined as a ratio between the measured WCU and ETo by Penman-Monteith. The experimental values of Kc compared

with the numerical vales. The results presented in Fig.(5). The correlation coefficient between Kc calculated and measured were 0.885, 0.873 and 0.9 for surface drip, subsurface drip and sprinkler system respectively.

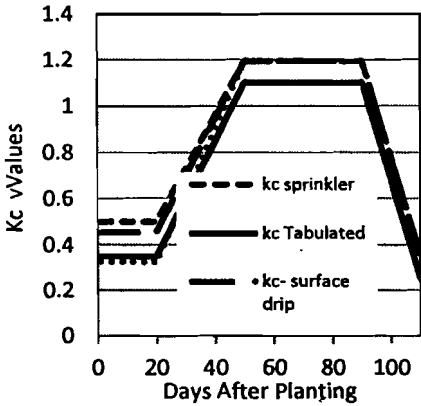


Fig. (4): Adjusted values of Sesame Kc for irrigation systems

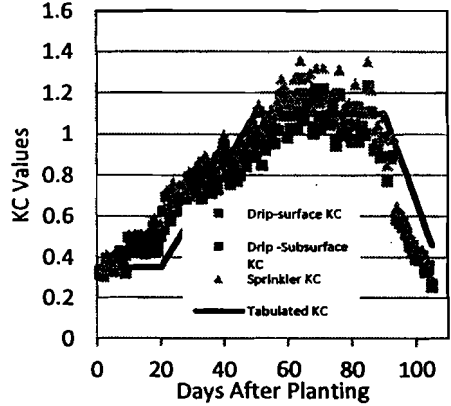


Fig.(5): Tabulated and experimental vales of Sesame Kc

Reference Evapotranspiration (ET₀):

Daily ET₀ along the growing season was calculated by Penman-Monteith equation. Values of ET₀ fluctuated due to the change of weather conditions as shown in Fig. (6). Seasonal ET₀ was 762.1 mm. ET₀ values during initial, development, mid-season and late season stages are shown in Table (10).

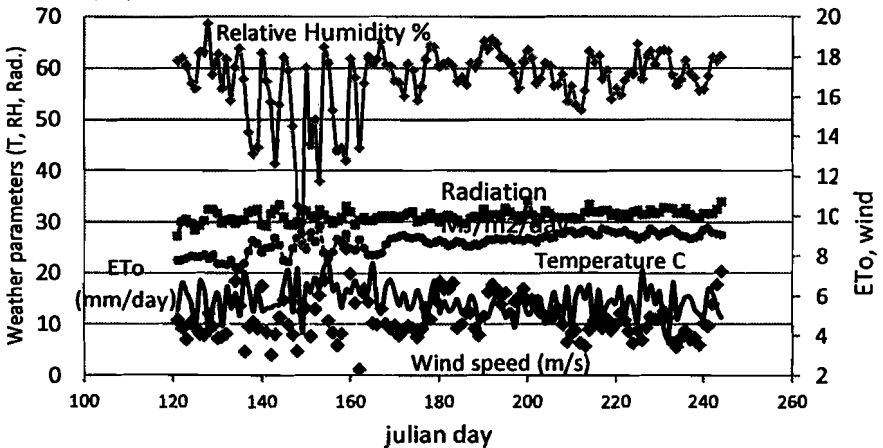


Fig. (6): ET₀ and weather data along the growing season of Sesame.

ET_{crop} and Water Consumptive Use WCU by Sesame:

Daily ET_{crop} of sesame was estimated for sprinkler, surface and subsurface drip irrigation systems, results were presented in Fig. (7). The ET_{crop} and WCU during initial, development, midseason and late season stages under the different irrigation systems are presented in Table (10). WCU under the irrigation methods were compared with ET_{crop} . The results indicated that the relationships were linear as shown in Fig. (8), Fig.(9) and Fig(10). In all cases the WCU is less than ET_{crop} .

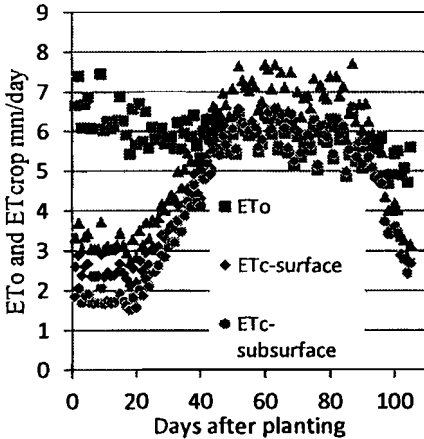


Fig. (7): ET_{crop} under sprinkler, drip surface and subsurface irrigation systems.

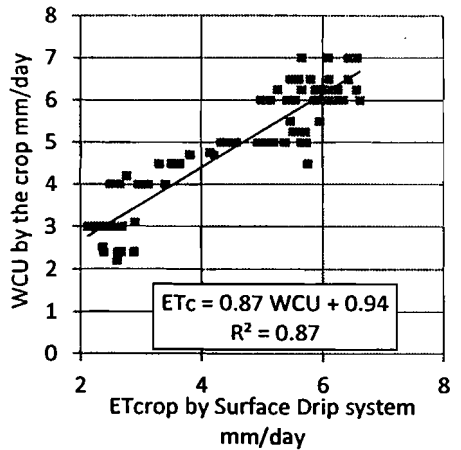


Fig. (8): The relationship between WCU and ET_c under drip surface.

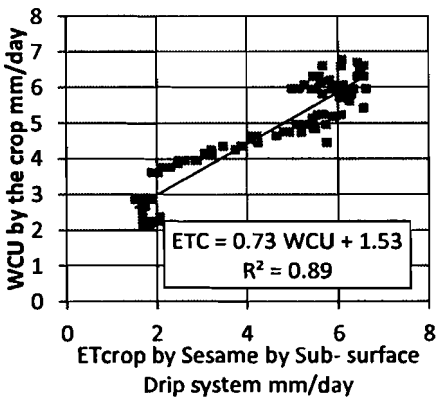


Fig. (9). The relationship between WCU and ET_c under drip sub surface.

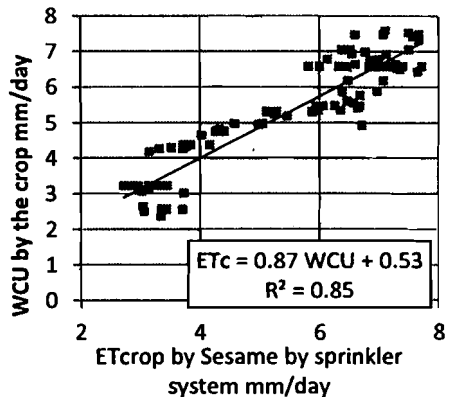


Fig. (10). The relationship between WCU and ET_c under sprinkler system

Gross Irrigation Water Requirements Under Different Irrigation Systems (GIWR):

Irrigation water is added to replenish the soil moisture by crop daily consumptive use. For the drip system (surface or subsurface) the water applied day by day while the interval was 4 days for the sprinkler system. The GIWR under the different irrigation system and during the growing stages are recorded in Table.(10). The last 10 days before harvesting, the irrigation was terminated to increase the oil content in seeds.

Table (10): ETo, ETc, CU and GIWR at different growing stages and irrigation systems

System	Stage	ETo (mm)	ETc (mm)	WCU(mm)	GIWR (mm)
Drip Surface	Initial	126.9	49.5	59.5	69.3
	Development	187.4	127.6	143.9	186.7
	Mid-Season	326.9	232.0	248.1	317.4
	Late-Season	84.9	64.2	38.2	55.4
Total / Season (mm)		762.1	473.3	490.0	628.8
Drip Sub-surface	Initial	126.9	35.4	54.4	49.6
	Development	187.4	118.0	134.3	173.4
	Mid-Season	326.9	232	238.5	317.9
	Late-Season	84.9	64.2	37.1	55.4
Total / Season (mm)		762.1	449.6	465.0	596.3
Sprinkler	Initial	126.9	63.5	62.7	121.5
	Development	187.4	158.0	153.0	304.8
	Mid-Season	326.9	270.7	268.0	505.6
	Late-Season	84.9	74.9	41.4	58.6
Total /season (mm)		762.1	567.1	525.0	990.5

Sesame Yield Function:

Sesame seeds and oil yields response to water has been studied after harvesting. The yield response to water showed quadratic function for both seeds and oil as:

$$Y = a + b X + c X^2 \quad (21)$$

Where:

- Y (yield (kg/fed.)
 X total irrigation water (m³/fed.)
 a, b, c regression coefficients

Yield functions of seeds and oil for different irrigation system and coefficients of the regression analyses are presented in Table (11). The yield function and water use efficiency of seeds and oil for the best treatment (sub surface drip) presented in Fig.(11) and (12) respectively.

Table (11): Regression coefficients of yield functions of seeds and oil for the irrigation systems

System	a		b		c		R ²	
	Seeds	oil	Seeds	oil	Seeds	oil	Seeds	oil
Drip surface	-3776.7	-2345.8	3.19	1.935	-5.7E-4	-3.53E-4	0.96	0.95
Drip subsurface	-4032.2	-2218.2	3.515	1.948	-6.9E-4	-3.75E-4	0.97	0.96
Sprinkler	-480.2	-529.6	0.547	0.389	-6.82E-5	-4.74E-5	0.88	0.94

To get the maximum yield of seeds or oil , the first derivative of the water yield function is set equal to zero and solving for X, then applying the X value in the original yield function results in maximum yield. The same was done to get the maximum oil yield. The expected maximum yield of seeds and oil under the irrigation systems presented in Table (12). It is obvious that the subsurface drip irrigation system produce highest seeds and oils and has the least water use.

Table(12): Expected maximum yield of seeds and oil

System	water m ³ /fed.	Maximum seeds yield (kg/fed.)	Maximum oil yield (kg/fed.)
Drip surface	2798.2	686.5	304.8
Drip subsurface	2619.6	702.6	311.4
Sprinkler	4010.3	616.7	268.1

Water Use Efficiency (WUE) of Sesame Seeds and Oil:

The results of WUE of seeds (WUE_s) and oil (WUE_o) are presented in Table (13). The sub surface drip WUE_s and WUE_o are plotted against the irrigation water as given in Fig. (11) and Fig. (12) respectively. In the graph it was seen that WUE have the same trend as the yield function.

Effect of irrigation system and irrigation regime on yield and plant growth parameters:

The statistical analyses in Table (13), showed significant difference in irrigation water used by the irrigation systems, insignificant difference in

oil yield by the irrigation systems, insignificant difference in seeds yield between surface and subsurface irrigation systems. The irrigation regime caused significant difference in yield of seeds and oil, and on their WUE. The data of sesame growth parameters are presented in Table (14). Results indicated that insignificant influence of the irrigation systems on the biological yield, plant height, weight of dry seeds/plant and oil content%. The only exception was found in No. of cap./plant, where a significant difference found between the sprinkler irrigation system and the drip system, meanwhile no difference found in No. of capsules. The effect of irrigation regime was significant on all growth parameter.

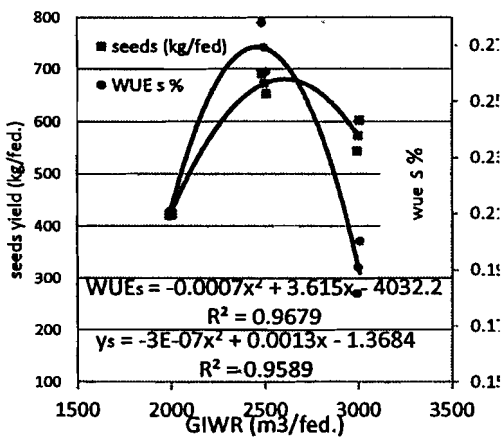


Fig. (11): yield function and water use efficiency of Sesame seeds (Subsurface drip)

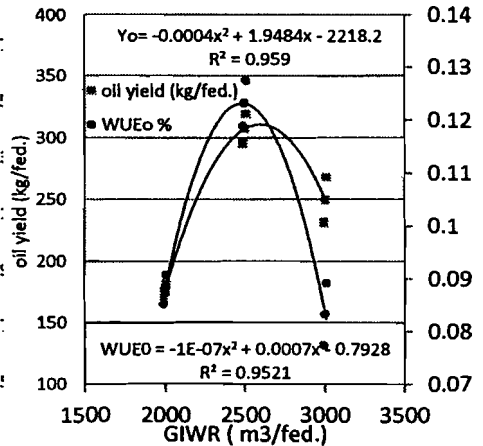


Fig. (12): yield function and water use efficiency of Sesame oil (sub surface drip)

Relationship Between Biological Yield and the Growth Parameters:

Results indicated high linear relationship between the biological yield and most of other yield parameters as shown in Fig. (13) and Fig. (14). The correlations between the biological yield and seeds yield, oil yield and plant height are 0.98, 0.93 and 0.92 respectively. The same trend was noticed between the biological yield and No. of capsules/plant, weight of dry seeds/plant and weight of 1000 seeds. The correlations were 0.84, 0.97 and 0.8 respectively.

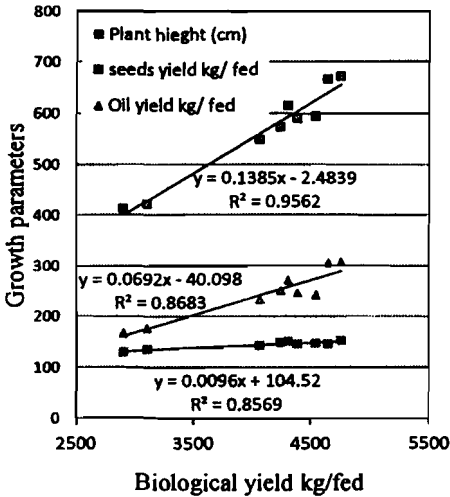


Fig (13): Biological yield versus plant height, seeds yield and oil yield

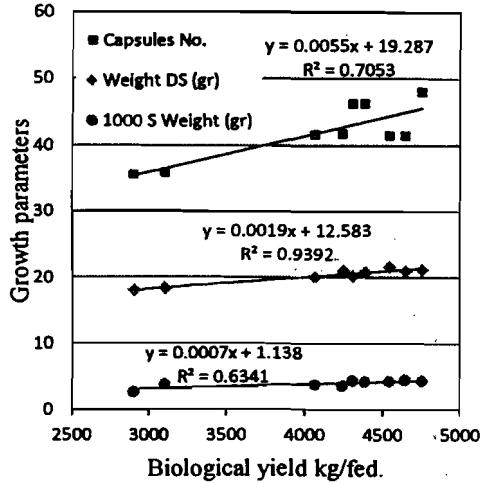


Fig (14): Biological yield versus No. of cap., weight of DS and 1000 seeds/plant

Table. (13): Effect of irrigation system and irrigation regime on Sesame production.

Irrigation Method	Irrigation Regime.	Gross Irrigation water applied M ³ /fad	Seeds yield Kg/fad.	Oil yield Kg/fad.	Water productivity (kg /m ³ water)	
					Seeds	Oil
I ₁		2641 a	557 b	237.9 a	0.2116 b	0.0902 b
I ₂		2496 b	555 b	244.3 a	0.2273 a	0.0982 a
I ₃		4193 c	585 a	249.8 a	0.1434 c	0.0612 c
LSD_{.05}		69.0	11.8	15.04	0.007	0.004
	D	2512 c	474 c	196.0 c	0.1929 b	0.0796 b
	N	3099 b	651 a	244.6 a	0.2231 a	0.1013 a
	E	3720 a	572 b	241.0 b	0.1629 c	0.0687 b
LSD_{.05}		31.0	21.8	24.91	0.0097	0.0158
	D	2112.5	411.9	166.6	0.1951	0.0789
I ₁	N	2641.0	666.3	305.3	0.2522	0.1155
	E	3169.5	594.4	242.1	0.1875	0.0764
	D	1996.0	420.6	175.7	0.2107	0.0880
I ₂	N	2495.0	671.9	307.4	0.2693	0.1232
	E	2998.5	573.1	249.8	0.1911	0.0833
	D	3428.0	589.9	246.2	0.1723	0.0719
I ₃	N	4159.5	615.0	271.2	0.1479	0.0652
	E	4992.5	548.8	232.0	0.1100	0.0465
LSD_{.05}		***	**	**	***	***

Table. (14): Effect of irrigation methods and irrigation regime on Sesame yield components.

Irrigation Method	Irrigation Regime	Biological Yield kg/ fad	Plant height (cm)	No. of Capsule/ plant	Weight dry seed / plant (gm)	Oil%
I ₁		4026.7 a	140.75 a	39.5 b	20.21 a	42.33 a
I ₂		4031.6 a	145.08 a	42.9 b	20.08 a	43.75 a
I ₃		4251.3 a	145.79 a	44.7 a	20.38 a	42.79 a
LSD _{.05}		256.86	5.24	1.82	0.77	1.95
	D	3460.0 c	136.96 c	39.21 c	19.00 b	41.29 c
	N	4567.8 a	148.91 a	45.27 a	20.74 a	45.33 a
	E	4281.7 b	145.75 b	41.63 b	20.88 a	42.25 b
LSD _{.05}		169.9	2.31	0.714	0.99	0.94
I ₁	D	2898.0	130.6	35.50	18.00	40.38
	N	4644.1	145.0	41.50	21.00	45.88
	E	4540.8	146.6	41.50	21.63	40.75
I ₂	D	3100.8	135.4	35.88	18.25	41.75
	N	4753.3	151.9	48.00	21.13	46.00
	E	4239.5	148.0	41.75	20.88	43.50
I ₃	D	4383.8	144.9	46.25	20.75	41.75
	N	4305.9	149.9	46.25	20.25	44.13
	E	4064.1	142.6	41.63	20.13	42.50
LSD _{.05}		**	**	**	**	**

Mean values having the same letter(s) are not significantly different based on LSD_{0.05} n s: not significant. Surface drip irrigation (I₁), Subsurface drip irrigation (I₂) and Sprinkler irrigation (I₃). Deficit irrigation (D = 80% of ET_c), Normal irrigation (N = 100% of ET_c) and Excessive irrigation (E = 120%)

CONCLUSION

From the obtained results it could be concluded that:

- FAO method for adjusting the crop coefficient is highly accurate. This was confirmed by comparing the actual crop coefficient of sesame that resulted from measuring the water consumptive use by the adjusted crop coefficient under drip surface, drip subsurface and sprinkler irrigation systems that operated at semi-arid conditions and sandy soil. The correlation coefficient between the adjusted sesame crop coefficient and the actual crop coefficient were 0.89, 0.87 and 0.9 respectively.
- The gross irrigation water requirements for sesame crop cultivated in sandy soil by drip surface, drip sub surface and sprinkler irrigation systems were 628. mm/season (2641m³/fed.), 596.3 mm/season (2496 m³/fed.) and 990 mm/season (4193m³/fed.), respectively.

- The relationship between the sesame water consumptive use and evapotranspiration indicated that the consumptive use in all cases is less than the evapotranspiration due to the water stored in plant tissue. The correlation coefficient between the consumptive use and the evapotranspiration under drip surface, drip subsurface and sprinkler irrigation systems were, 0.93, 0.94, and 0.92 respectively.
- The irrigation system indicated significant effect on gross irrigation water used and water use efficiency of both seeds and oil. Insignificant effect was found on oil yield, biological yield and plant height. The irrigation regimes indicated significant effect on gross irrigation water used and on all other yield parameters and components.
- Among all the study treatments, the application of subsurface drip irrigation system at 100% of ET_c indicated the best results related to the yield of seeds and oil and the other yield components, although, there is no significant difference between the irrigation water used between the subsurface drip and surface drip irrigation
- The same conclusion was remarked from yield function when applying maximum irrigation water for the irrigation systems. The subsurface drip irrigation system produced 702.6 kg seeds/fed. and 311.4 kg oil/fed. when 2619.6 m³ water was added per fed., meanwhile the surface drip irrigation system produced 686.5 kg seeds/fed. and 304.8 kg oil/fed. when 2798.2 m³ water was added per fed. The sprinkle irrigation system produced 616.7 kg seeds/fed. and 268.1 kg oil/fed. when 4010.3 m³ water was added per fed..

REFERENCES

- ASAE Standers 2001 : Standers, Engineering practices, data. No. 47143403. Amer. Soc. Agric. Eng., St. Joseph, MI. pp 1027
- ASCE, Describing Irrigation Efficiency and Uniformity. J. Irrig. Drain. Div., ASCE 1978, 104 (IRI), 35–41.
- Allen, R. G., L. S. Pereira; D. Raes and Smith. 1998. Crop evapotranspiration. FAO Irrigation and Drainage Paper No. 56, Rome , Italy. 297 pp.

- Benami, I. and A. Ofen 1984. Irrigation Engineering. Irrigation Engineering Publications (IESP), Haifa, Israel. 257 pp.
- Black, C. A., D. D. Evans, L.E.Ensminger, J. L. White, F. E. Clark and R. C. Dinauer. 1985. Methods of soil analyses. Seven Printing. Amer. Soc. of Agro. Madison, Wisconsin USA.
- Christiansen J.E. (1942): Irrigation by Sprinkling. California Agriculture Experiment Station Bulletin, No. 670
- CoHort Software (2005). Costat Statistical package (version 6.311), P.O.Box 1149, Berkeley, CA, 94701, USA.
- Doorenbos, J. and W. O. Pruitt (1977). Guideline for predicting crop water requirements. FAO, Irrig. and Drain. Paper No. 24 pp: 122- 132
- El-Wakil, A.M. and S.A. Gaafar, (1988). Effect of water stress on sesame. Assiut J. Agric. Sci., 9: 363-374.
- Erkan. B., D., Mehmet, M. Simsek and S Gereck. (2007). Effect of irrigation methods and irrigation intervals spacing on yield and yield components of sesame growing in arid area. J. of Agronomy 6 (3): 439-443.
- Kassab O.M., A.A. El-Noemani and H.A. El-Zeiny , (2005). Influence of Some Irrigation Systems and Water Regimes on Growth and Yield of Sesame Plants. J. of Agronomy, 4: 220-224.
- Li J and Rao M., 2004. Crop yield as affected by uniformity of sprinkler irrigation system. Agricultural Eng. Int: the CIGR J. Sci. Res. Dev. Manuscript LW01 004, 111.
- Manal M. T., S. A. Ouda and F. A. Khalil. (2007). Irrigation Optimization for Different Sesame Varieties Grown under Water Stress Conditions. J of Applied Sciences Research, 3(1): 7-12.
- Merriam J.L., Keller J. (1978): Farm Irrigation System Evaluation: A Guide for Management. Department of Agricultural and Irrigation Engineering, Utah State University, Logan.271 pp.
- Molden D. 2003. A water-productivity framework for understanding and action in: Kijne, J.W., Barker, R Molden, D. (Eds.), Water Productivity in Agriculture: Limits and Opportunities for

- Improvement. International Water Management Institute, Colombo, Sri Lanka, pp. 1-18.
- Simonne, E. H. and M. D. Dukes, 2010. Principles and practices of irrigation management for vegetables. University of Florida, Hort. Sci. Extension. pp 17-23.
- Solomon, K. (1977). Evaluation criteria for trickle irrigation emission devices. Proc. 4th Annu. Int. Drip Irrig. Assoc. Meet. pp. 65-76.
- Vermeieren, I. and Gobling G. A., 1980. Localized irrigation. Design, installation, operation, evaluation. FAO paper No. 36.
- Walker, W.R. 1980. Sprinkler and Trickle Irrigation. Colorado State University, Fort Collins, Colorado 80523. 10 Chapters.

المخلص العربي

إدارة المياه لمحصول السمسم في الأراضي الرملية

جمال شرف^١ خليل عبدالحليم علام^٢ - عزه عبد الفتاح حسن^٢ - هاشم محمد محمود^٢

تم اجراء تجربة حقلية بمنطقة البستان لدراسة ادارة المياه لمحصول السمسم لموسمين زراعيين متتاليين وتم دراسة تأثير تطبيق ثلاثة طرق للرى وهى تنقيط سطحي وتنقيط تحت سطحي ورى بالرش وثلاثة معدلات لماء الرى المضاف على اساس ٨٠% و ١٠٠% و ١٢٠% من البخرنتج للمحصول. وكانت جدولة الرى للرى بالتنقيط (السطحي و تحت سطحي) هى الرى كل يومين وللرى بالرش كل اربعة ايام. ولحساب كميات مياه الرى تم الاستعانة بمعامل المحصول للسمسم من نشرات منظمة الزراعة والاغذية العالمية (الفاو). وقد تم تعديل قيم معامل المحصول طبقاً للظروف المحلية. كما تم تقدير معامل المحصول الكلى عن طريق تقدير الاستهلاك المائى المستفد من التربة. واطهرت النتائج علاقة ارتباط قوية بين القيم الحسابيه المعجلة والقيم الناتجة من قياس رطوبة التربه قبل الرى وكانت كالاتى ٠,٨٩, ٠,٨٧, ٠,٩٠ لكل من قيم المحصول المقدره على اساس الرى بالتنقيط السطحي والتنقيط تحت سطحي و بالرش على الترتيب. وكان الاستهلاك المائى لمحصول السمسم والنتاج من قياس رطوبة التربة مقداره ٤٩٠م/موسم للتنقيط السطحي و ٤٦٥ م/موسم لتنقيط تحت سطحي و ٥٢٥ م/موسم للرى بالرش. وكان البخرنتج المقدر حسابيا ٤٧٣ م/موسم للتنقيط السطحي و ٥٠ م/موسم للتنقيط تحت سطحي و ٥٧٦ م/موسم للرى بالرش. وبعد الحصاد اظهرت النتائج ان متوسط استهلاك محصول السمسم ٦٢٩ م/موسم (٢٦٤١ م^٢/فدان) للرى بالتنقيط السطحي فى مقابل ٥٩٧ م/موسم (٢٤٩٦ م^٢/فدان) للرى بالتنقيط تحت سطحي و ٩٩٠ م/موسم (٤١٩٣ م^٢/فدان) للرى بالرش.

١ استاذ الهندسة الزراعية كلية الزراعة سجا باشا - جامعة الاسكندرية

٢ باحث اول - ٣ باحث - معهد بحوث الهندسة الزراعية مركز البحوث الزراعية - وزارة الزراعة - شارع نادي الصيد - الدقى - جيزة

نتج عن هذه الكميات من مياه الري محصول كامل بمقدار ٤٠٢٧ كج/فدان و ٤٠٣٢ كج/فدان و ٤٢٥١ كج/فدان لنظم الري بالتنقيط السطحي والتحت سطحي والرش على الترتيب. و اظهرت النتائج احصائيا (فيما يخص نظم الري أو المعاملات الرئيسية) ظهور فروق معنوية في كميات مياه الري المستخدمه بينما لم تظهر فروق معنوية في المحصول الكلى ومحصول الزيت وارتفاع النبات. وفيما يخص معاملات البخرنتج (المعاملات الثانوية) فاطهرت النتائج فروق معنوية بين كميات مياه الري وكل عناصر ومكونات الانتاج الأخرى. كما انه قد تم دراسة العلاقات بين عناصر المحصول والانتاجيه من البذور والزيت وماء الري المستهلك وتم استنتاج دالة المحصول للزيت والبذور لكل نظام ري على حده واطهرت النتائج ان تطبيق الري تحت سطحي مع معاملة الري ١٠٠% من البخرنتج يعطى اعلى انتاجيه من البذور (٦٧١,٩ كج/فدان) واعلى انتاجيه من الزيت (٣٠٧,٤ كج/فدان) واعلى كفاءة لاستخدام المياه سواء للبذور او للزيت (٠,٢٦٩ كج/م^٢ و ٠,١٢٣ كج/م^٢ على الترتيب). واطهرت النتائج ان هناك علاقة خطيه بين المحصول الكلى ومعظم عناصر الانتاج مثل محصول الزيت ومحصول البذور و ارتفاع النبات وعدد الكبسولات لكل نبات ووزن الحبوب الجافة لكل نبات ووزن ١٠٠٠ بذرة وذلك بمعاملات ارتباط ٠,٩٨, ٠,٩٣, ٠,٩٢, ٠,٨٤, ٠,٩٧, ٠,٨٤, ٠,٨٤ على الترتيب.